## **Hybrid Pro Modular Kit 17**

#### HP-K-17

Hybrid Pro<sup>™</sup> Modular exhibits and counters are a perfect solution for the serious exhibitor. Exhibits feature heavy-duty aluminum extrusion frames and push-fit fabric graphics. Count on making an unforgetable impact with Hybrid Pro Modular exhibit kits, counters, and accessories.



We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

#### features and benefits:

- Silver aluminum extrusion frame
- 15'9" tall 20' x 20' island display
- Base structure features white laminate panels with accessible storage closet 96"w x 36"d; lockable door on 36" side
- Six Lumina 200 LED floodlights

- Kit includes frame, accessible lockable storage space, four pillowcase graphics, two fabric graphic panels, three shaped Sintra, three counters, six small monitor mounts, six 200 LED floodlights, two molded OCE storage cases and one woodcrate
- Lifetime hardware warranty against manufacturer defects

#### dimensions:

#### Hardware

Assembled unit:

Center Tower: 15'9"h x 7'5.625"d'

Counter w/Sintra Panels: 51.125"w x 94.5"h x 39.375"d

Counter (each): 37"w x 38.18"h x 25"d 940mm(w) x 970mm(h) x 635mm(d)

Counter holds max weight 50 lbs / 22.7 kgs

#### Graphic

Refer to related graphic templates for more information.

Visit: www.exhibitors-handbook.com/ graphic-templates

#### Shipping

Shipping dimensions - ships in 3 cases: 2 OCE cases: 18"l x 40" - 66"h x 18"d 457mm(w) x 1016mm(h) - 1676mm(h) x 457mm(d)

1 WOODCRATE case: 101"| x 53"h x 49"d 2565mm(l) x 1346mm(h) x 1245mm(d)

Approximate shipping weight (entire kit): 1353 lbs / 614 kgs

#### additional information:

Graphic material: Dye-sublimated fabric

Tabletop color options:




silver











Lights Included: Lumina 200 LED floodlight, straight arm and adjustable head, black finish, 19.5" from end to end

Small monitor bracket holds 13-39" LCD, max weight 25 lbs / 11.34 kgs


\*Flooring and monitors not included


### R-HP-K-17

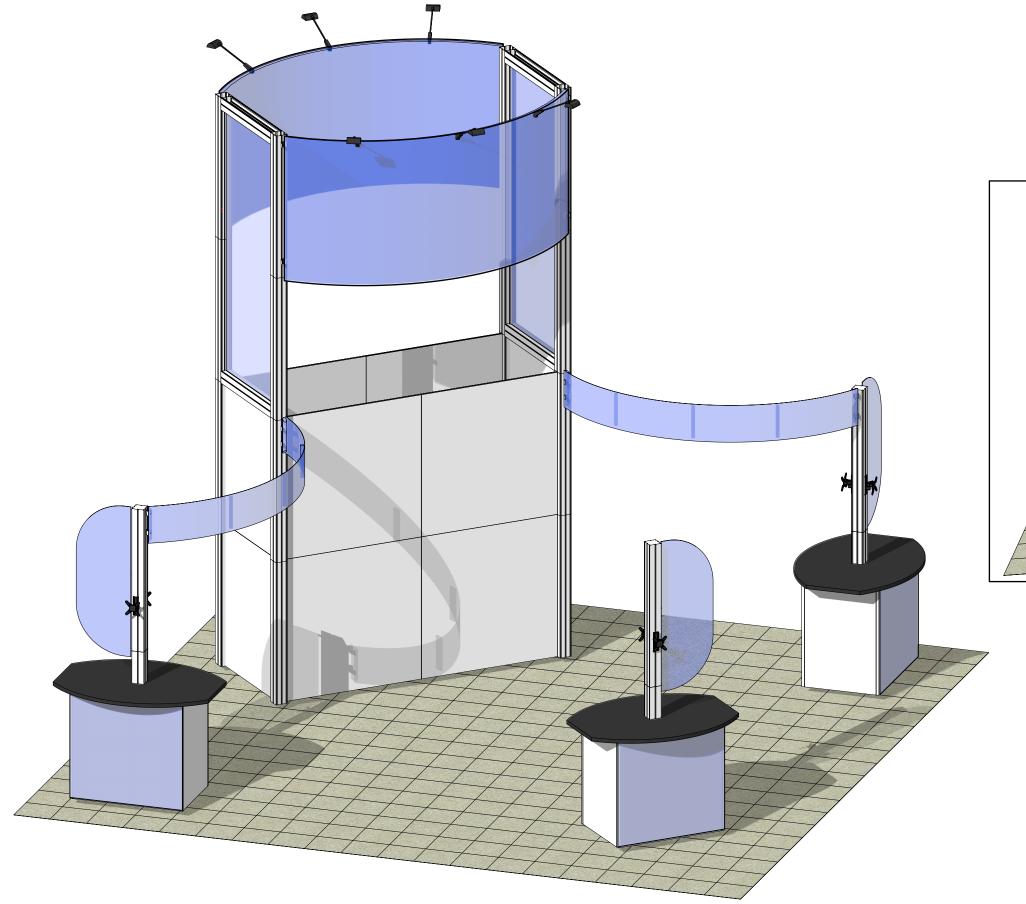

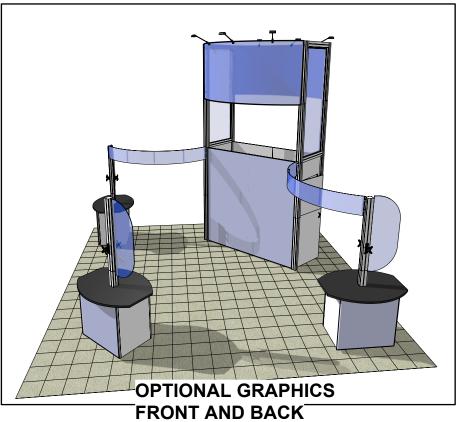


Code	# Description
R15	16 1200MM PM4S2 SILVER EXTRUSION WITH PH2 STOPS AT 315MM BOTH ENDS
R71	2 1200MM V x 900MM W LAMINATE PANEL
R35	2 900MM PM4S2 SILVER EXTRUSION WITH LOCKS BOTH ENDS
R66	2 900MM PM4U SILVER EXTRUSION WITH LOCKS BOTH ENDS
R70	8 1200MM V x 1200MM W LAMINATE PANEL
L180N-1200	2 1200MM 180N DEGREE SILVER LINK EXTRUSION
R57	3 900MM V x 900MM W LAMINATE PANEL
R74	6 900MM V x 600MM W LAMINATE PANEL
L90S-900	12 900MM 90 DEGREE SILVER LINK EXTRUSION
R13	15 600MM PH2 CONNECTOR WITH TENSION GLIDES
R56	3 900MM W x 900MM V LAMINATE CABINET DOOR PANEL
R69	1 900MM W x 2400MM V FULL SIZE SPLIT LAMINATE DOOR PANEL
CT-54L	3 5' X 4' LAMINATE COUNTER TOP
R114	3 1200MM PM4S2 WITH SET SCREW AT 305MM BOTH ENDS WIRE HOLE @ BOTTOM
R113	3 1200MM PM4S2 WITH SET SCREW AT 305MM BOTH ENDS WIRE HOLE @ MIDDLE
GRAPHIC D2	1 49.75" X 18" DSG DOUBLE SIDED GRAPHIC ON 6MM SINTRA
PANEL CLAMP	9 45-panel clamp (hamburger clip)
GRAPHIC D3	1 49.75" X 18" DSG DOUBLE SIDED GRAPHIC ON 6MM SINTRA
GRAPHIC D1	1 49.75" X 18" DSG DOUBLE SIDED GRAPHIC ON 6MM SINTRA
TC-30MM	16 SILVER ANODIZE FINISH 30MM TUBE CLAMP
CFS	1 (A) 8' L X 4' H CURVE BANNER W/ GRAPHIC I
LEDL10S	6 LED SPOTLIGHT,3M,UL PLUG W/TRANSFORMER SILVER
NF-RK-09-1	1 (C2) 108" X 12" & CONVEX 106" X 12" CONCAVE C SHPD FAB STRUCT GRFX - PRINT B.S.
L180N-600	4 600MM 180N DEGREE SILVER LINK EXTRUSION
L180N-1200	8 1200MM (47.24") 180N DEGREE SILVER LINK EXTRUSION
L180N-600	16 600MM (23.62") 180N DEGREE SILVER LINK EXTRUSION
GRAPHIC B1	1 86 10/16" (H) X 35 7/8" (W) SINGLE SIDED DYESUB GRAPHIC WITH FCE-2
CFS	1 (A2) 8' L X 4' H CURVE BANNER W/ GRAPHIC H
GRAPHIC B2	1 86 10/16" (H) X 35 7/8" (W) SINGLE SIDED DYESUB GRAPHIC WITH FCE-2
NF-RK-09-1	1 (C1) 108" X 12" CONVEX & 106" X 12" CONCAVE C SHPD FAB STRUCT GRFX - PRINT B.S. (RK-09 KIT)
GRAPHIC E1	1 35 3/16" (H) X 37 1/4" (W) ROLLABLE DETACHABLE DSG GRAPHIC WITH MAGNET ON BACK PERIMETER
GRAPHIC E2	1 35 3/16" (H) X 37 1/4" (W) ROLLABLE DETACHABLE DSG GRAPHIC WITH MAGNET ON BACK PERIMETER
GRAPHIC E3	1 35 3/16" (H) X 37 1/4" (W) ROLLABLE DETACHABLE DSG GRAPHIC WITH MAGNET ON BACK PERIMETER
PM4BP1	3 15 3/4" X 9 7/8" ALUMINUM BASE PLATE
SM-BRACKET	6 SMALL MONITOR BRACKET
INTERNAL SHELF	3 BLACK INTERNAL SHELF
SS1	12 SHELF SUPPORT PIN (SILVER)
R67	4 900MM (35.43") FABRIC CONNECTION EXTRUSION WITH ROUTES
R68	4 2186MM (86.06") FABRIC CONNECTION EXTRUSION
GRAPHIC M	2 98.5" X 98.25" DYESUB GRAPHIC WITH VELCRO






## **BOM**


R-HP-K-17

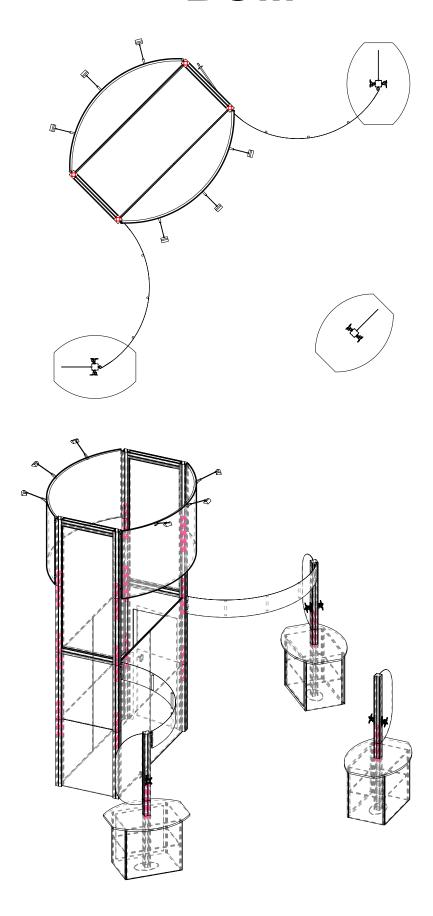

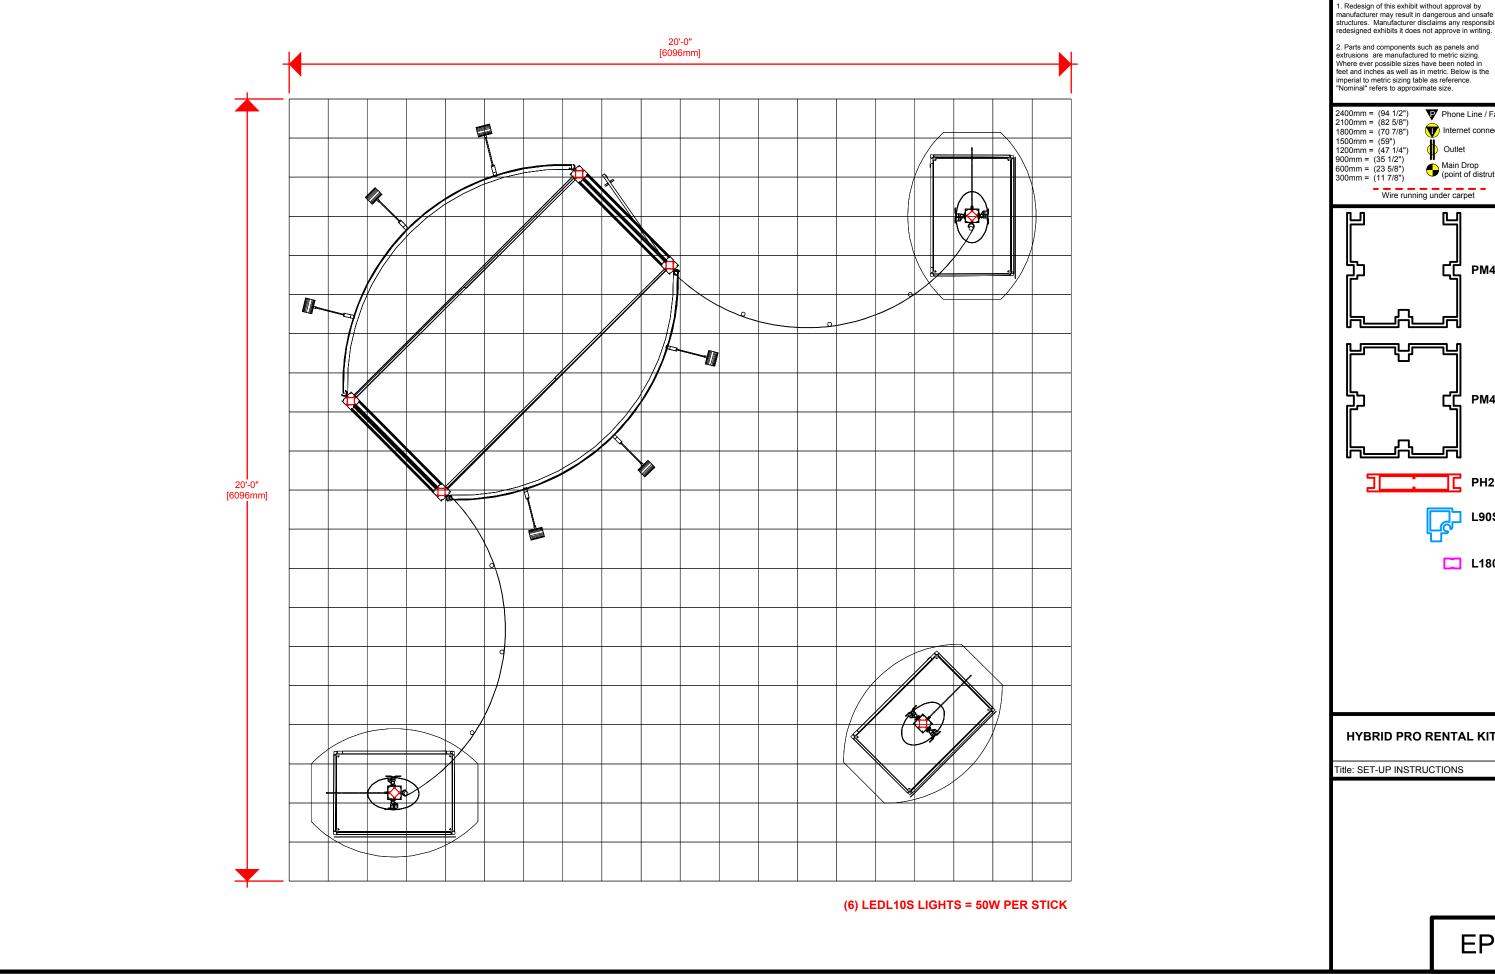

Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

Phone Line / Fax Internet connection Outlet Main Drop (point of distrution)

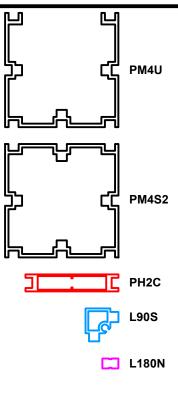



#### HYBRID PRO RENTAL KIT


EP


Code	# Description		Redesign of this exhibit without approval by
	4 1200MM PM4S2 SILVER EXTRUSION WITH PH2 STOPS AT 315MM BOTH E	NDS	manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibilit redesigned exhibits it does not approve in writing.
R71	1 1200MM V x 900MM W LAMINATE PANEL		Pedesigned exhibits it does not approve in whining.      Parts and components such as panels and extrusions are manufactured to metric sizing.
	4 1200MM V x 1200MM W LAMINATE PANEL		extrusions are manufactured to metric sizing.  Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the
	2 600MM 180N DEGREE SILVER LINK EXTRUSION		imperial to metric sizing table as reference. "Nominal" refers to approximate size.
	6 600MM (23.62") 180N DEGREE SILVER LINK EXTRUSION		2400mm = (94 1/2") Phone Line / Fa 2100mm = (82 5/8")
	SLIDE LINK INTO EXTRUSION CHANNEL	12'-3 3/8" [3742.1mm]	1800mm = (70 7/8") 1500mm = (37 1/4") 900mm = (35 1/2") 600mm = (23 5/8") 300mm = (11 7/8")  Wire running under carpet  PM4  PM4  PM4  L903
L180	R15 R70 R15 R70 R15 R70 R15 R70 R15 R70 R15 R70 L180N-600 R70 L180N-600 R70 L180N-600	NOTE: IF OPTIONAL GRAPHICS PANELS WITH VELCRO	HYBRID PRO RENTAL KIT

Code	#	Description
R15	4	1200MM PM4S2 SILVER EXTRUSION WITH PH2 STOPS AT 315MM BOTH ENDS
R13	4	600MM PH2 CONNECTOR WITH TENSION GLIDES
TC-30MM	4	SILVER ANODIZE FINISH 30MM TUBE CLAMP







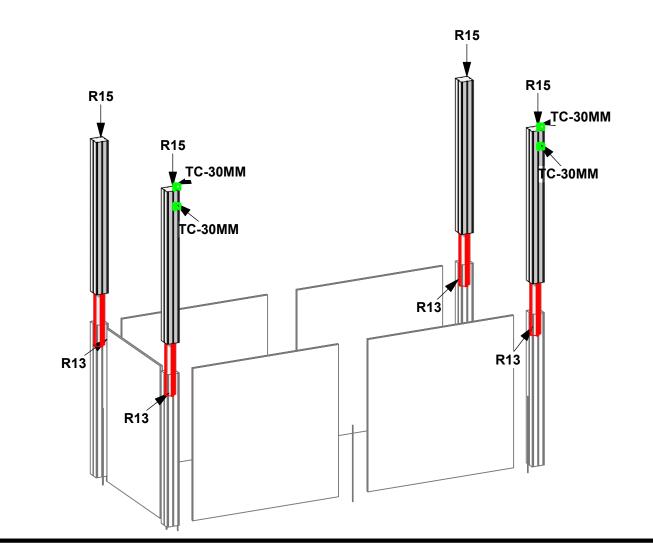

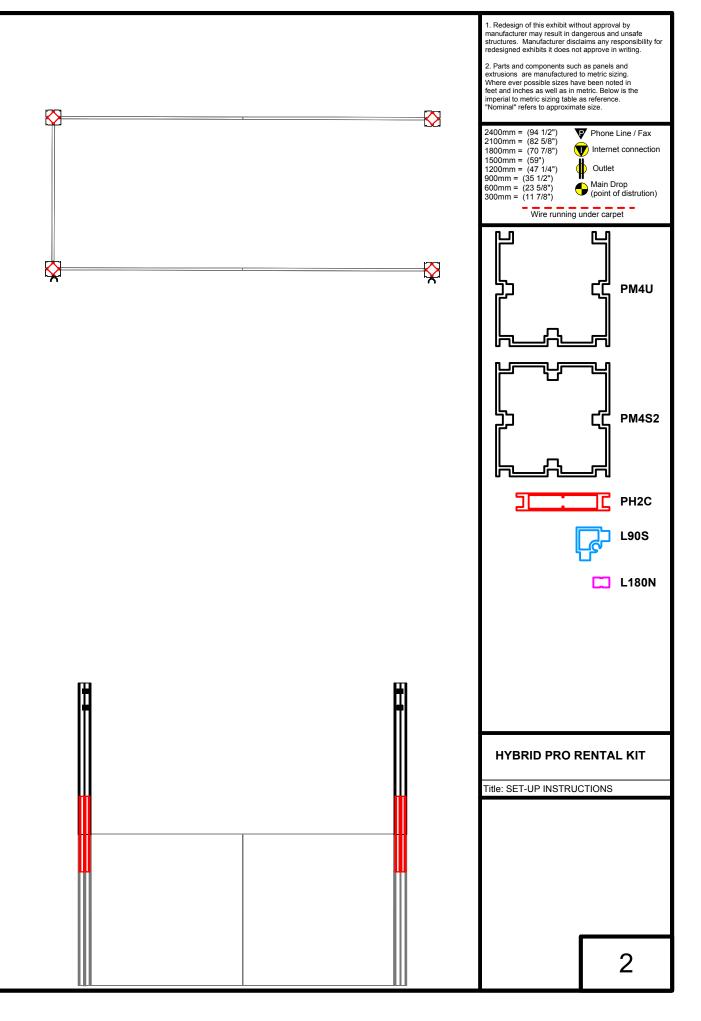



Code	#	Description
R69	1	900MM W x 2400MM V FULL SIZE SPLIT LAMINATE DOOR PANEL
L180N-1200	2	1200MM (47.24") 180N DEGREE SILVER LINK EXTRUSION
L180N-600	4	600MM (23.62") 180N DEGREE SILVER LINK EXTRUSION

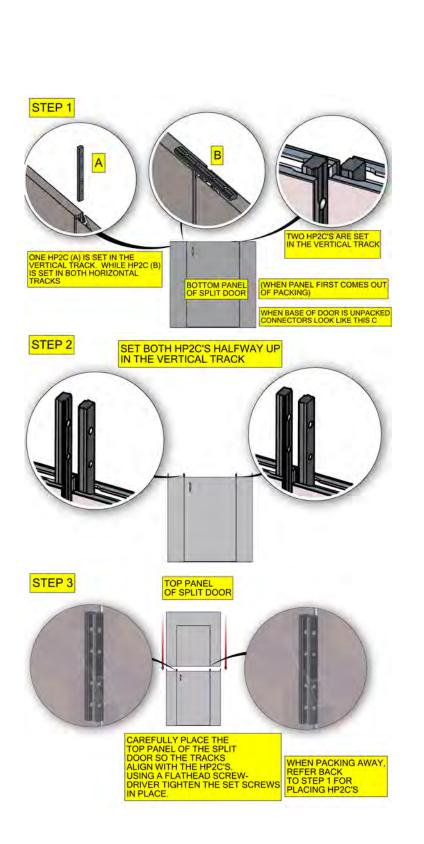


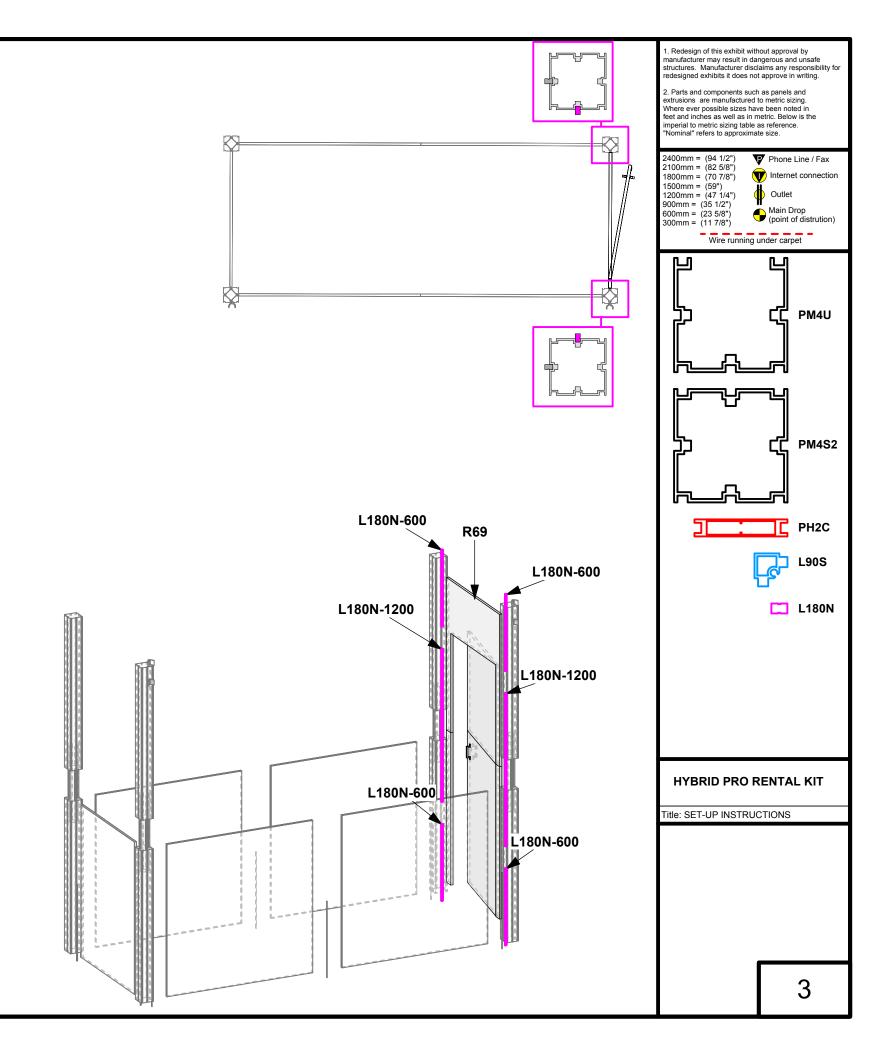



Code	#	Description	
R71	1	1200MM V x 900MM W LAMINATE PANEL	
R70	4	1200MM V x 1200MM W LAMINATE PANEL	
L180N-1200	2	1200MM 180N DEGREE SILVER LINK EXTRUSION	
L180N-1200	6	1200MM (47.24") 180N DEGREE SILVER LINK EXTRUSION	





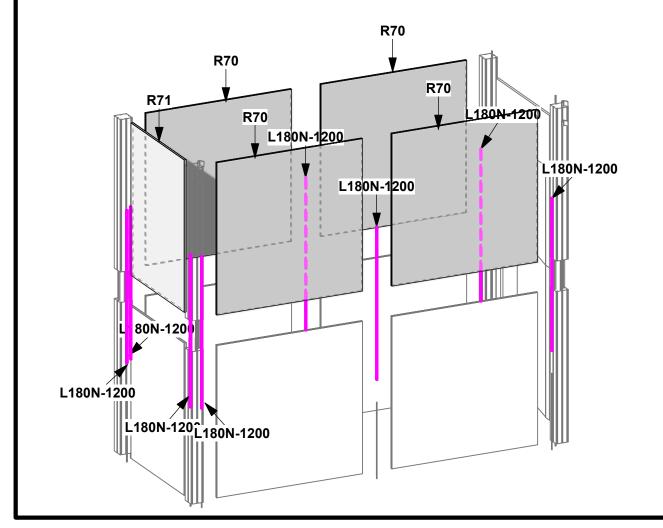



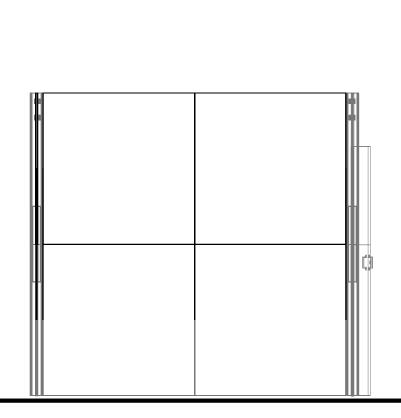

Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.


2400mm = (94 1/2") 2100mm = (82 5/8") 1800mm = (70 7/8") 1500mm = (59") 1200mm = (47 1/4") 900mm = (35 1/2") 600mm = (23 5/8")

Internet connection 600mm = (23 5/8") 300mm = (11 7/8")

Main Drop (point of distrution) Wire running under carpet

Phone Line / Fax

Outlet

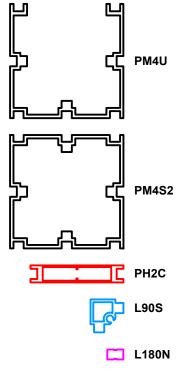


**HYBRID PRO RENTAL KIT** 


Title: SET-UP INSTRUCTIONS

4

				_
Code		Description	1	Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for
R15	4		1	redesigned exhibits it does not approve in writing.
R15 R13	_	600MM PH2 CONNECTOR WITH TENSION GLIDES  R15		redesigned exhibits it does not approve in writing.  2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.  2400mm = (94 1/2") 2100mm = (82 5/8") 1800mm = (70 7/8") 1500mm = (35 1/2") 600mm = (35 1/2") 600mm = (35 5/8") 300mm = (11 17/8")  Wire running under carpet  PM4U
R15	5	R15		PH2C L90S L180N
R13	R	R13  PM4D CONNECTOR TENS GLIDE	ION 2-	HYBRID PRO RENTAL KIT  Title: SET-UP INSTRUCTIONS
		1-Slide the PM4D CONNE into the POST until it rests PM4D Stop. 2-Then slide the top POS PM4D CONNECTOR.		5

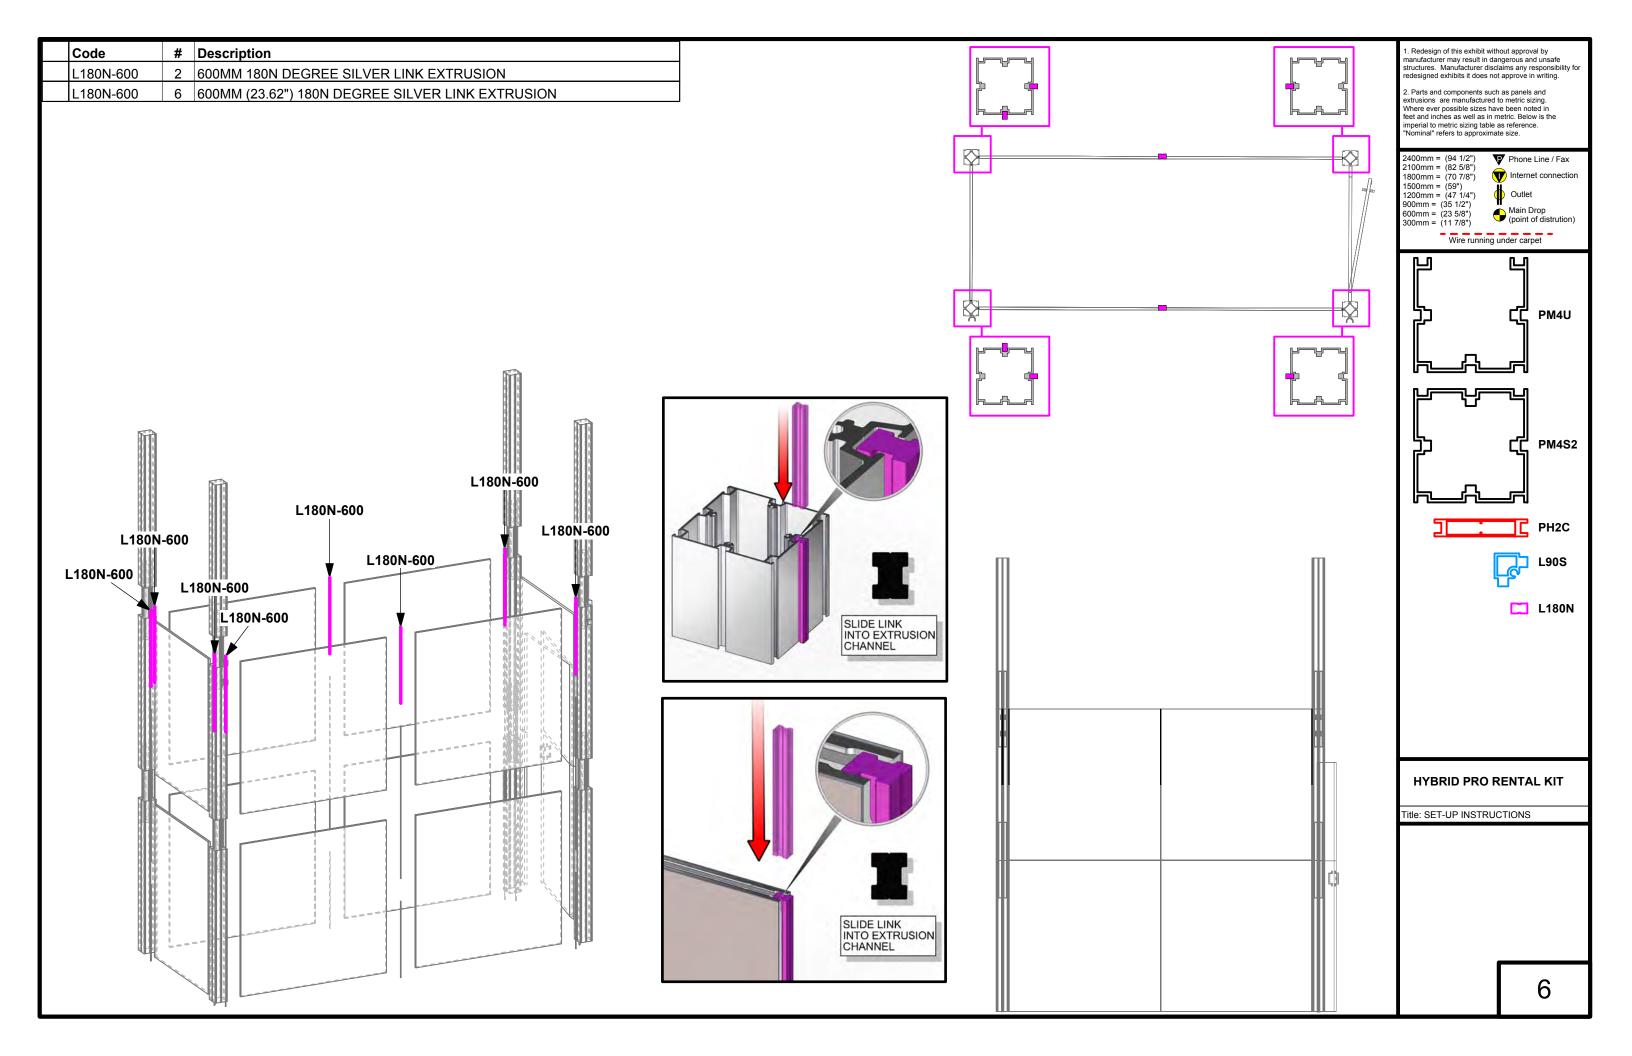



Code # Description	manufacturer ma	his exhibit without approval by ay result in dangerous and unsafe urfacturer disclaims any responsibility fo
R35   2   900MM PN   R67   2   900MM (38)	INOTE: MAKE SURE TO SLIDE FC EXTRUSION BEFORE  IN TO CHANGE  I	ay result in dangerous and unsafe ufacturer disclaims any responsibility ibits it does not approve in writing.  nponents such as panels and manufactured to metric sizing, sible sizes have been noted in as well as in metric. Below is the c sizing table as reference. to approximate size.  4 1/2")  2 5/8")  Phone Line / Fax  2 7/8")  Internet connectio  7 1/4")  July Main Drop  Main Drop

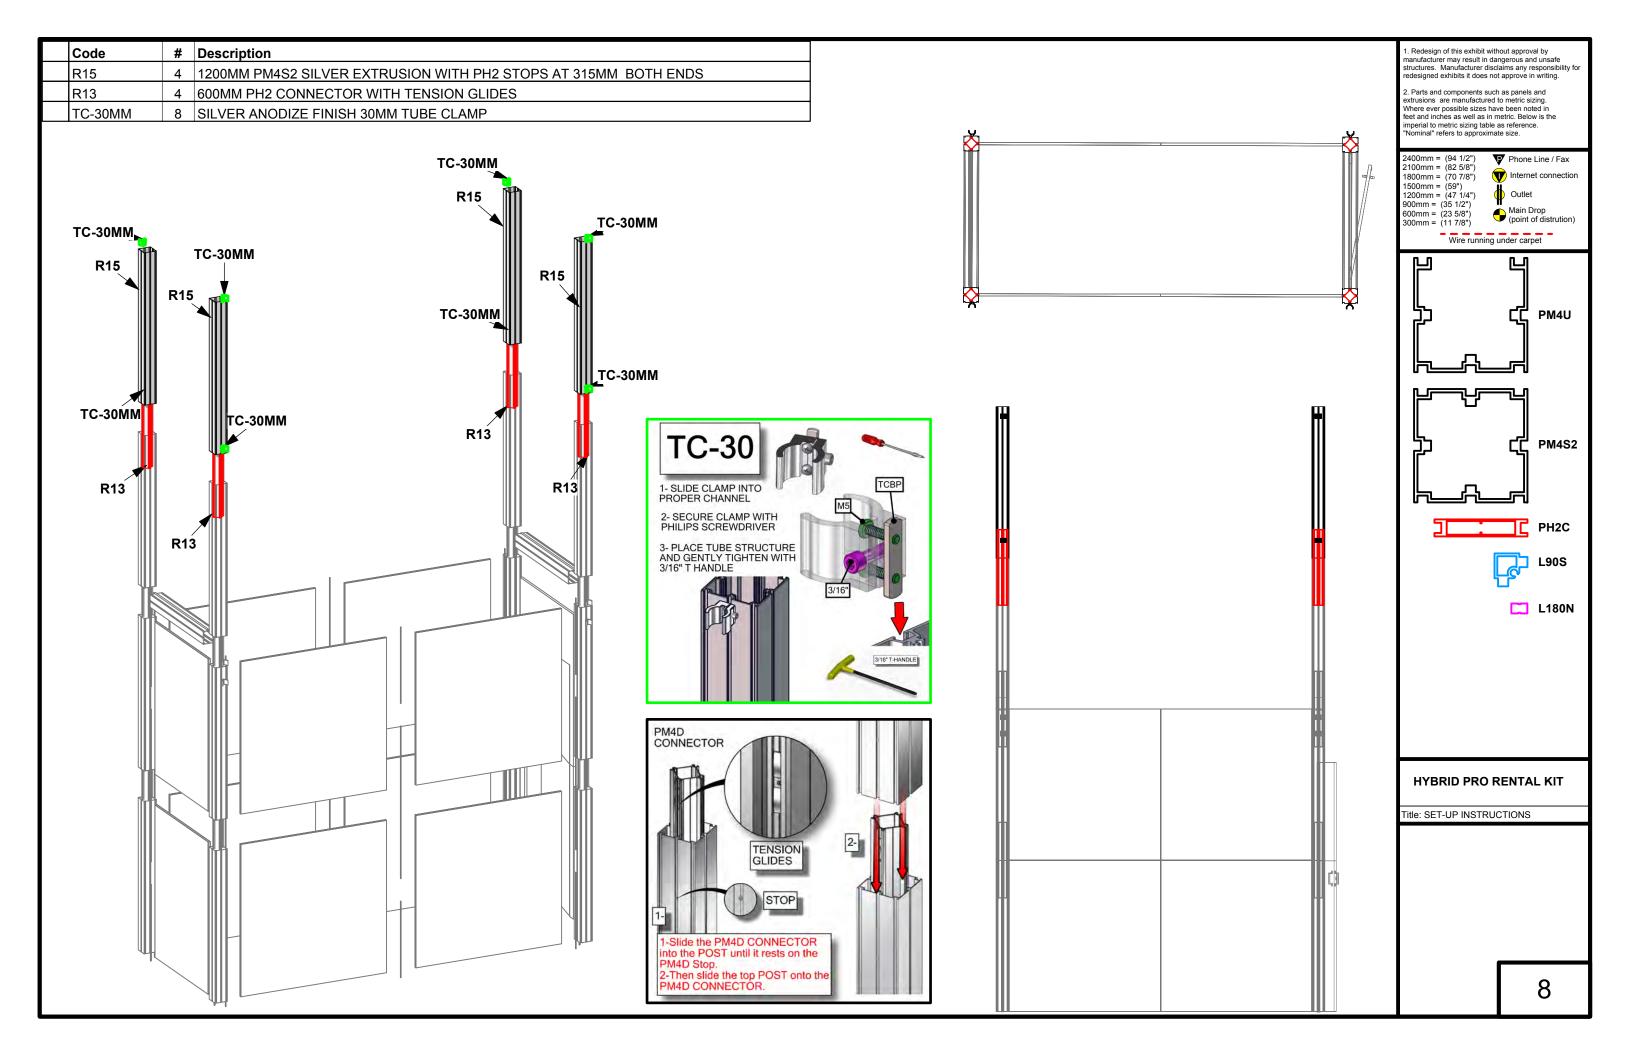

	1		
Code	# Description	· · · · · · · · · · · · · · · · · · ·	Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for
R66	2 900MM PM4U SILVER EXTRUSION WITH LOCKS BOTH ENDS		redesigned exhibits it does not approve in writing.
R67	2 900MM (35.43") FABRIC CONNECTION EXTRUSION WITH ROUTES	· · · · · · · · · · · · · · · · · · ·	Parts and components such as panels and extrusions are manufactured to metric sizing.  Where ever possible sizes have been noted in
R68	4 2186MM (86.06") FABRIC CONNECTION EXTRUSION		feet and inches as well as in metric. Below is the imperial to metric sizing table as reference.
R66	R68 R68 R68 R68 R68 R68 R68	MAKE SURE TO SLIDE CTRUSION BEFORE	imperial to metric sizing table as reference. "Nominal" refers to approximate size.  2400mm = (94 1/2") 2100mm = (82 5/8") 1800mm = (70 7/8") 1200mm = (47 1/4") 900mm = (35 1/2") 600mm = (23 5/8") 300mm = (11 7/8")  Wire running under carpet  PM4U  PM4S2  PM4S2  L180N
	WARNINGI Locks should On be turned a query as not to STRIP over torqueing the	The furn, so the locks by seem seem seem seem seem seem seem see	HYBRID PRO RENTAL KIT  Title: SET-UP INSTRUCTIONS

Code	#	Description	
GRAPHIC B1	1	86 10/16" (H) X 35 7/8" (W) SINGLE SIDED DYESUB GRAPHIC WITH FCE-2	
GRAPHIC B2	1	86 10/16" (H) X 35 7/8" (W) SINGLE SIDED DYESUB GRAPHIC WITH FCE-2	

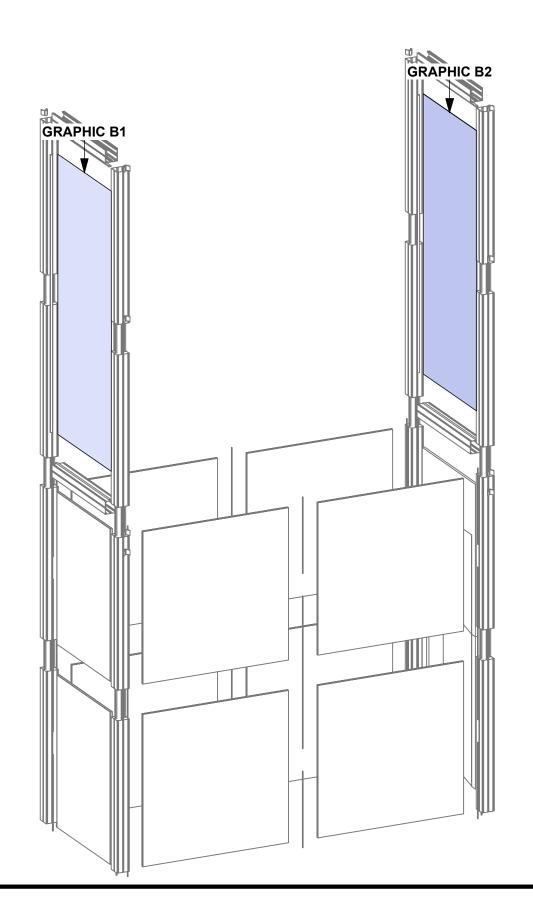

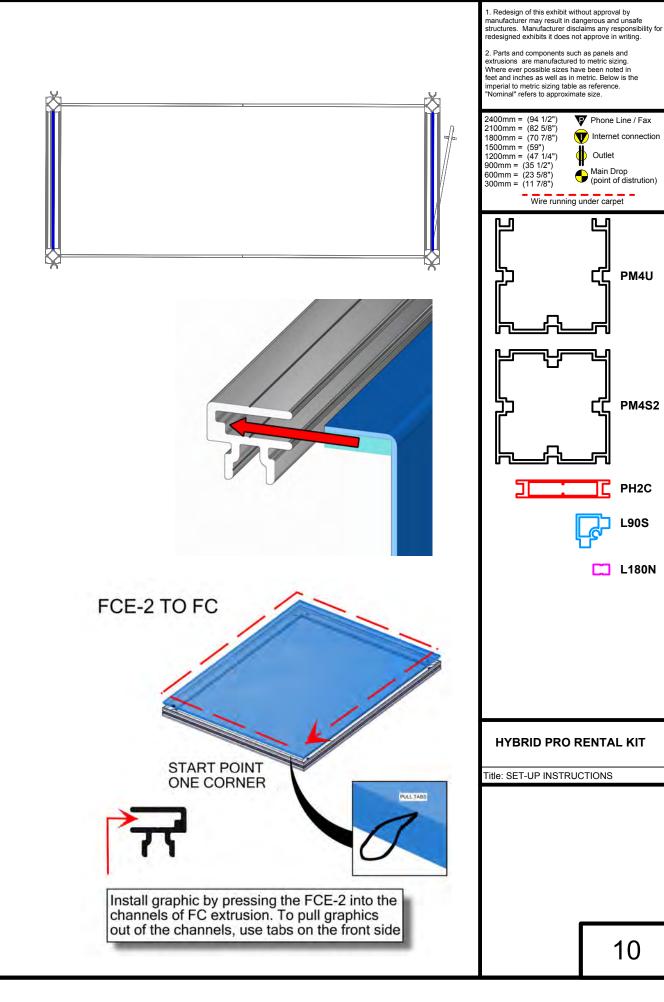

Phone Line / Fax

PM4U

PM4S2

PH2C

L90S

**L180N** 


10


**HYBRID PRO RENTAL KIT** 


Outlet Main Drop (point of distrution)


Wire running under carpet


Code # Description		Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for
CFS 1 (A) 8' L X 4' H CURVE BANNER W/ GRAPHIC I		structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.
CFS 1 (A2) 8' L X 4' H CURVE BANNER W/ GRAPHIC H		Parts and components such as panels and extrusions are manufactured to metric sizing.
		Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference
CFS		imperial to metric sizing table as reference. "Nominal" refers to approximate size.
		2400mm = (94 1/2") Phone Line / Fax
		2100mm = (82 5/8") 1800mm = (70 7/8") Internet connection 1500mm = (59")
		1200mm = (47 1/4") Outlet
		600mm = (23 5/8") 300mm = (11 7/8")  Main Drop (point of distrution)
CFS		Wire running under carpet
		┨╠ <sub>╸</sub> ╶┛
		PM4S2
		1
		PH2C
	PLEASE SEE THE NEXT PAGE FOR	
	DETAILED SETUP INSTRUCTIONS	L90S
		🗀 L180N
	TC-30	l .
		l .
	1- SLIDE CLAMP INTO PROPER CHANNEL TCBP	
	IMD III	l .
	2- SECURE CLAMP WITH PHILIPS SCREWDRIVER	l .
	3- PLACE TUBE STRUCTURE AND GENTLY TIGHTEN WITH 3/16" T HANDLE	HYBRID PRO RENTAL KIT
	3/16" T HANDLE	
	Tourist Touris	Title: SET-UP INSTRUCTIONS
	3/16"	
I		
	3/16"T-HANDLE	
		11
PT		

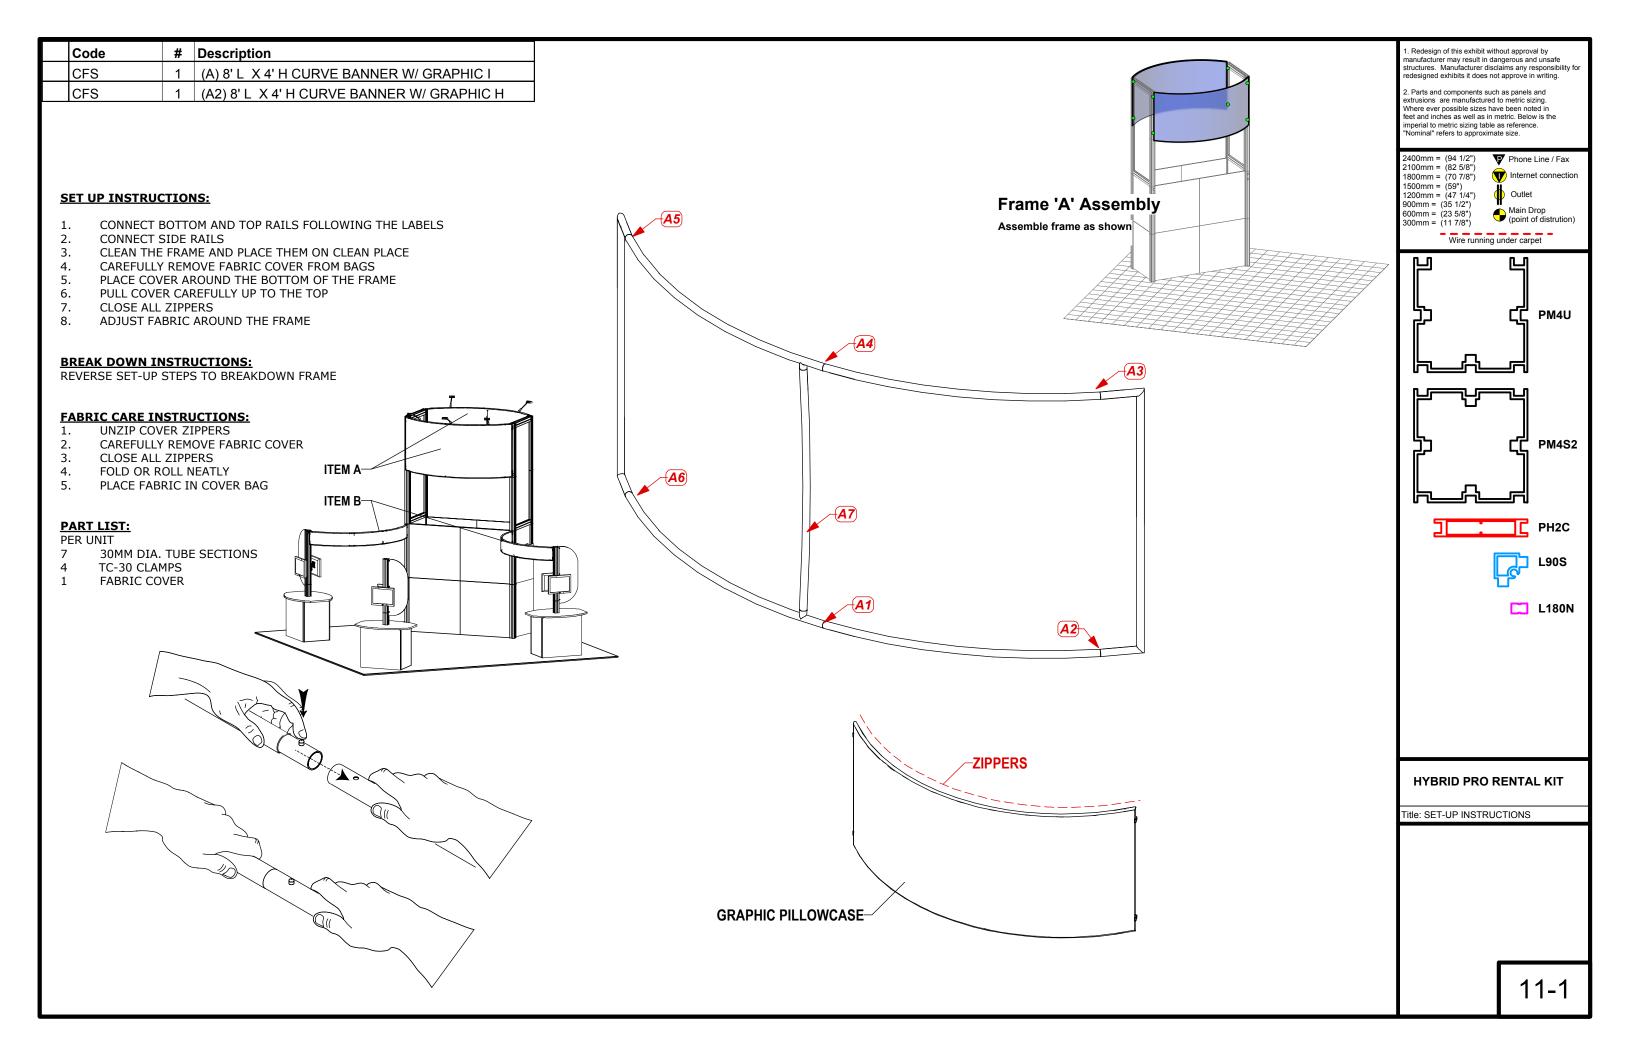


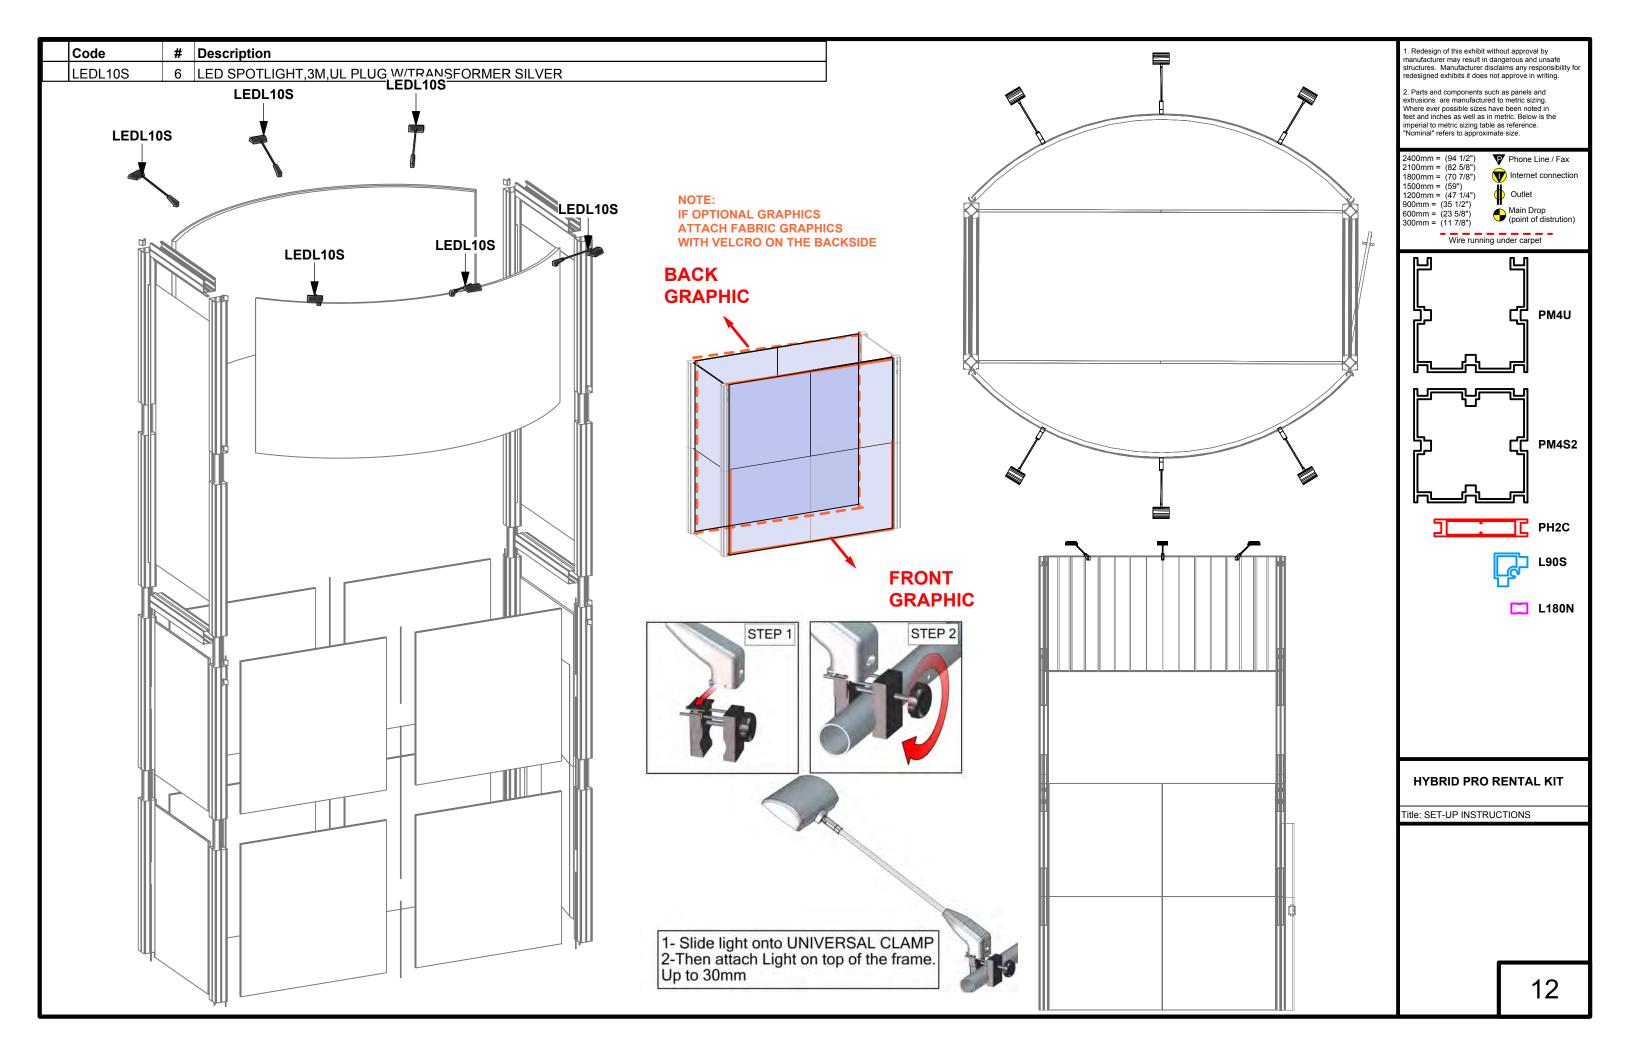


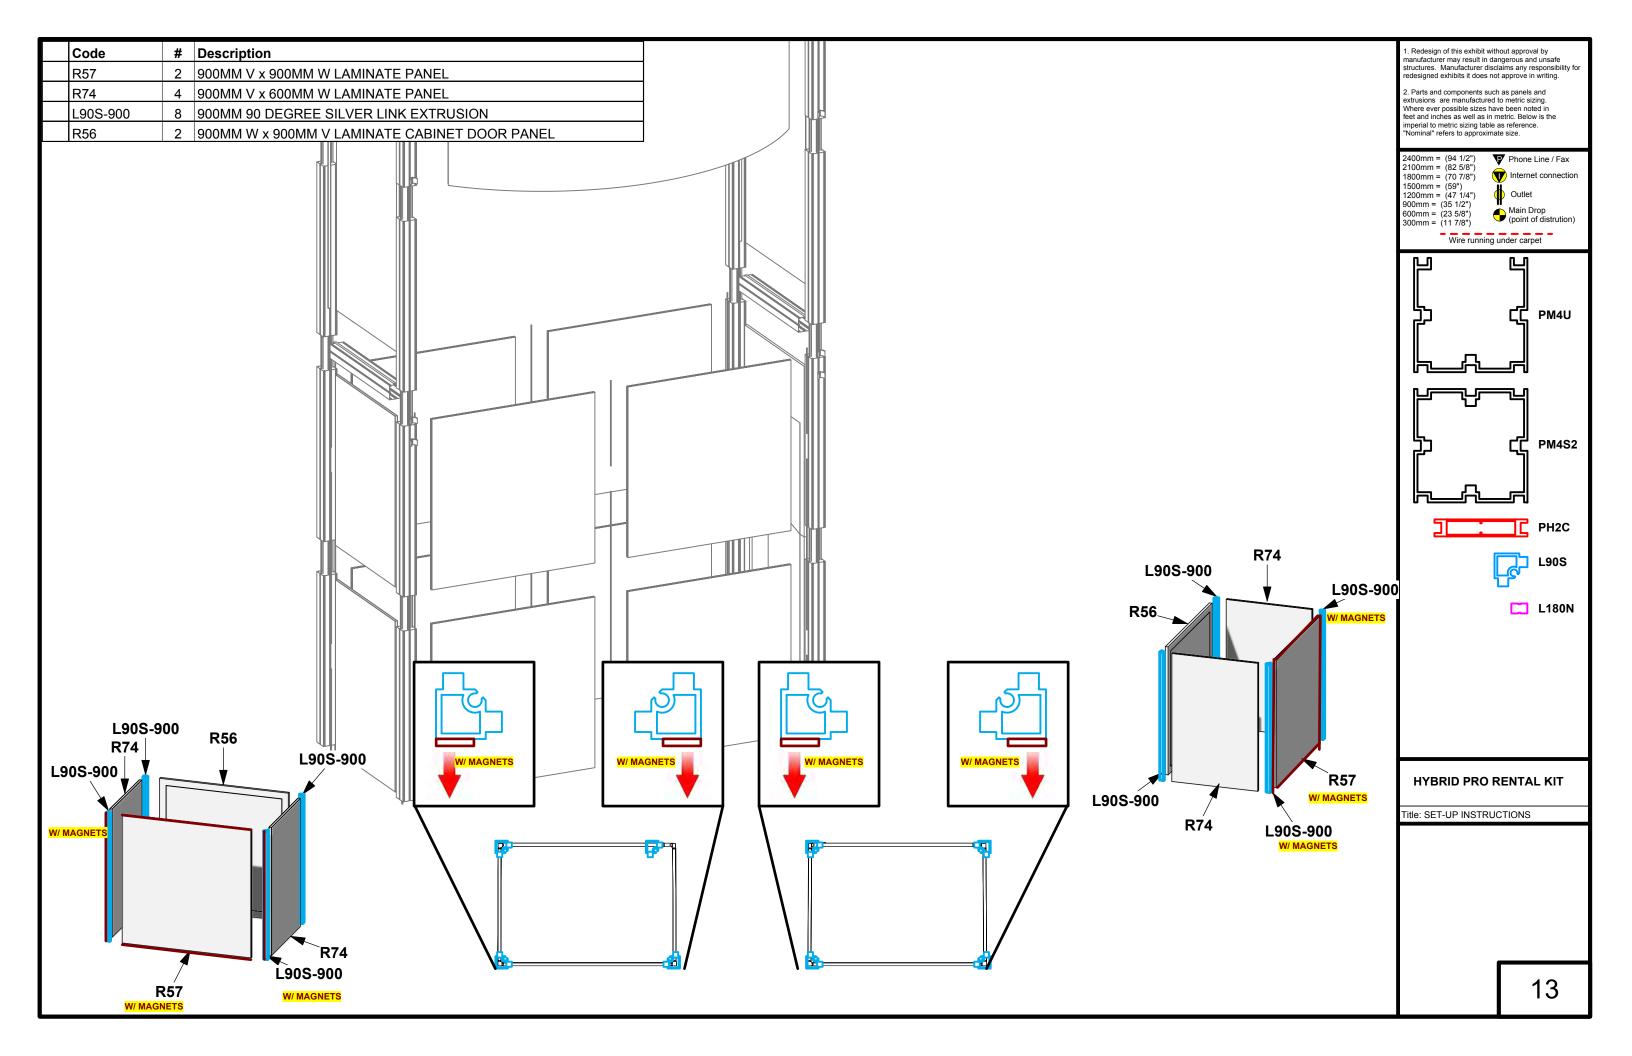


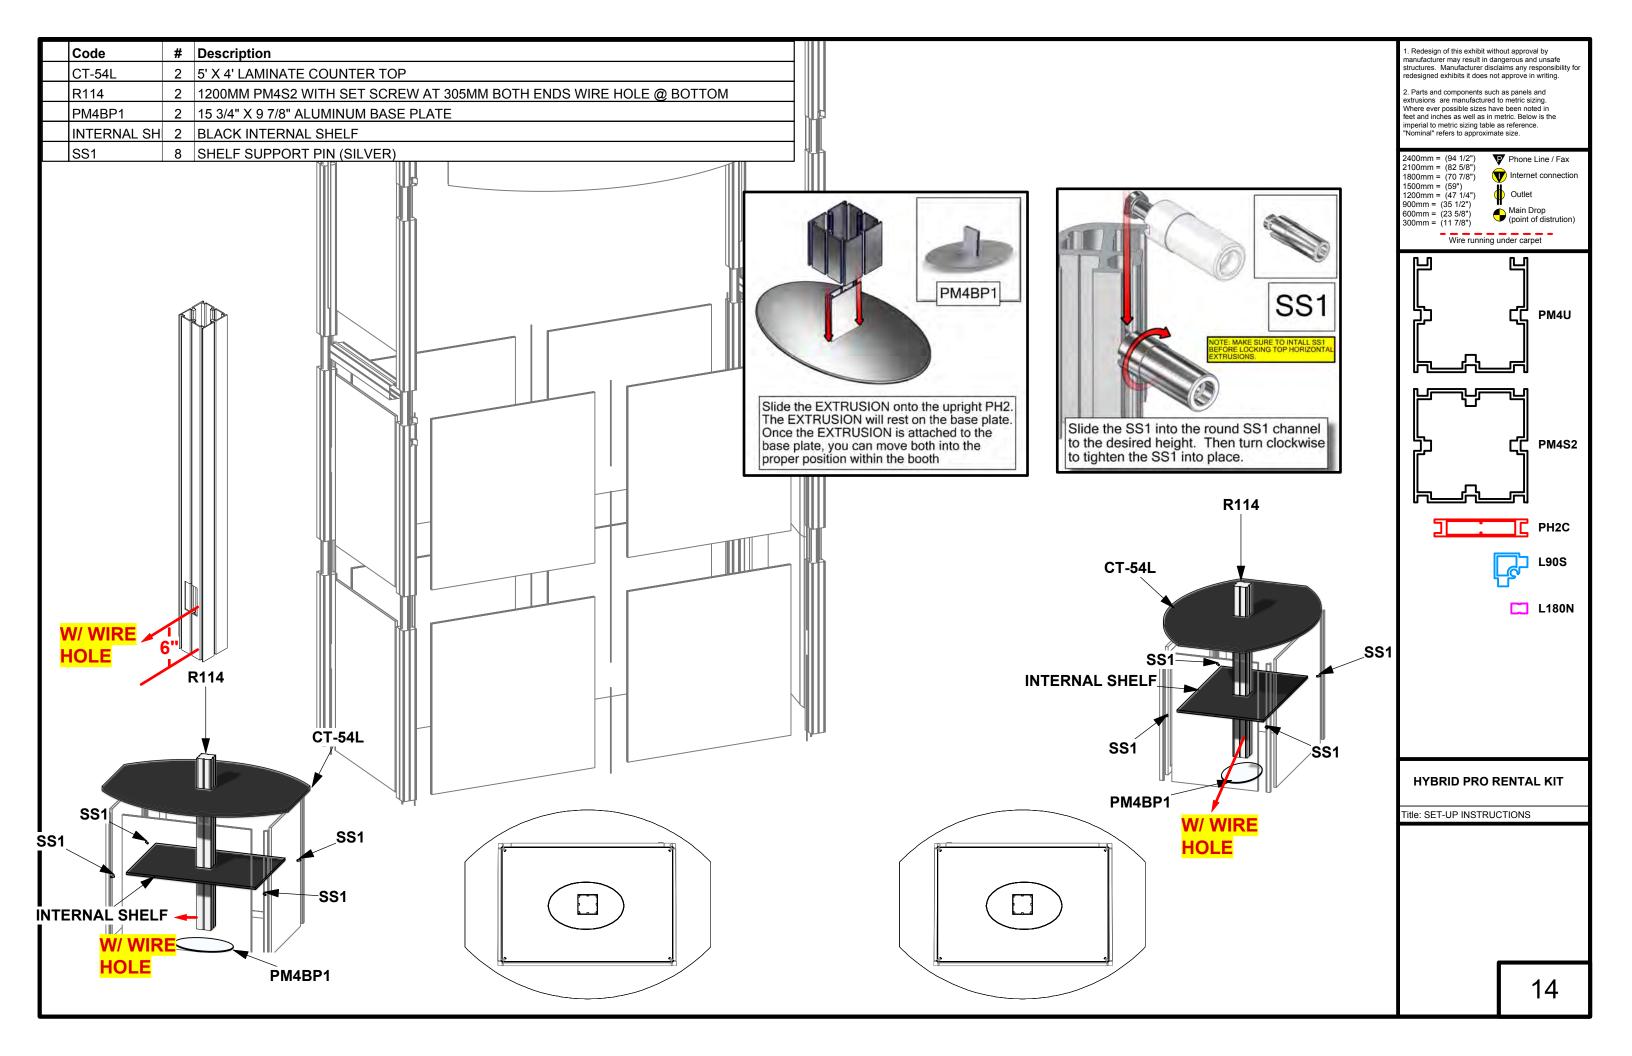


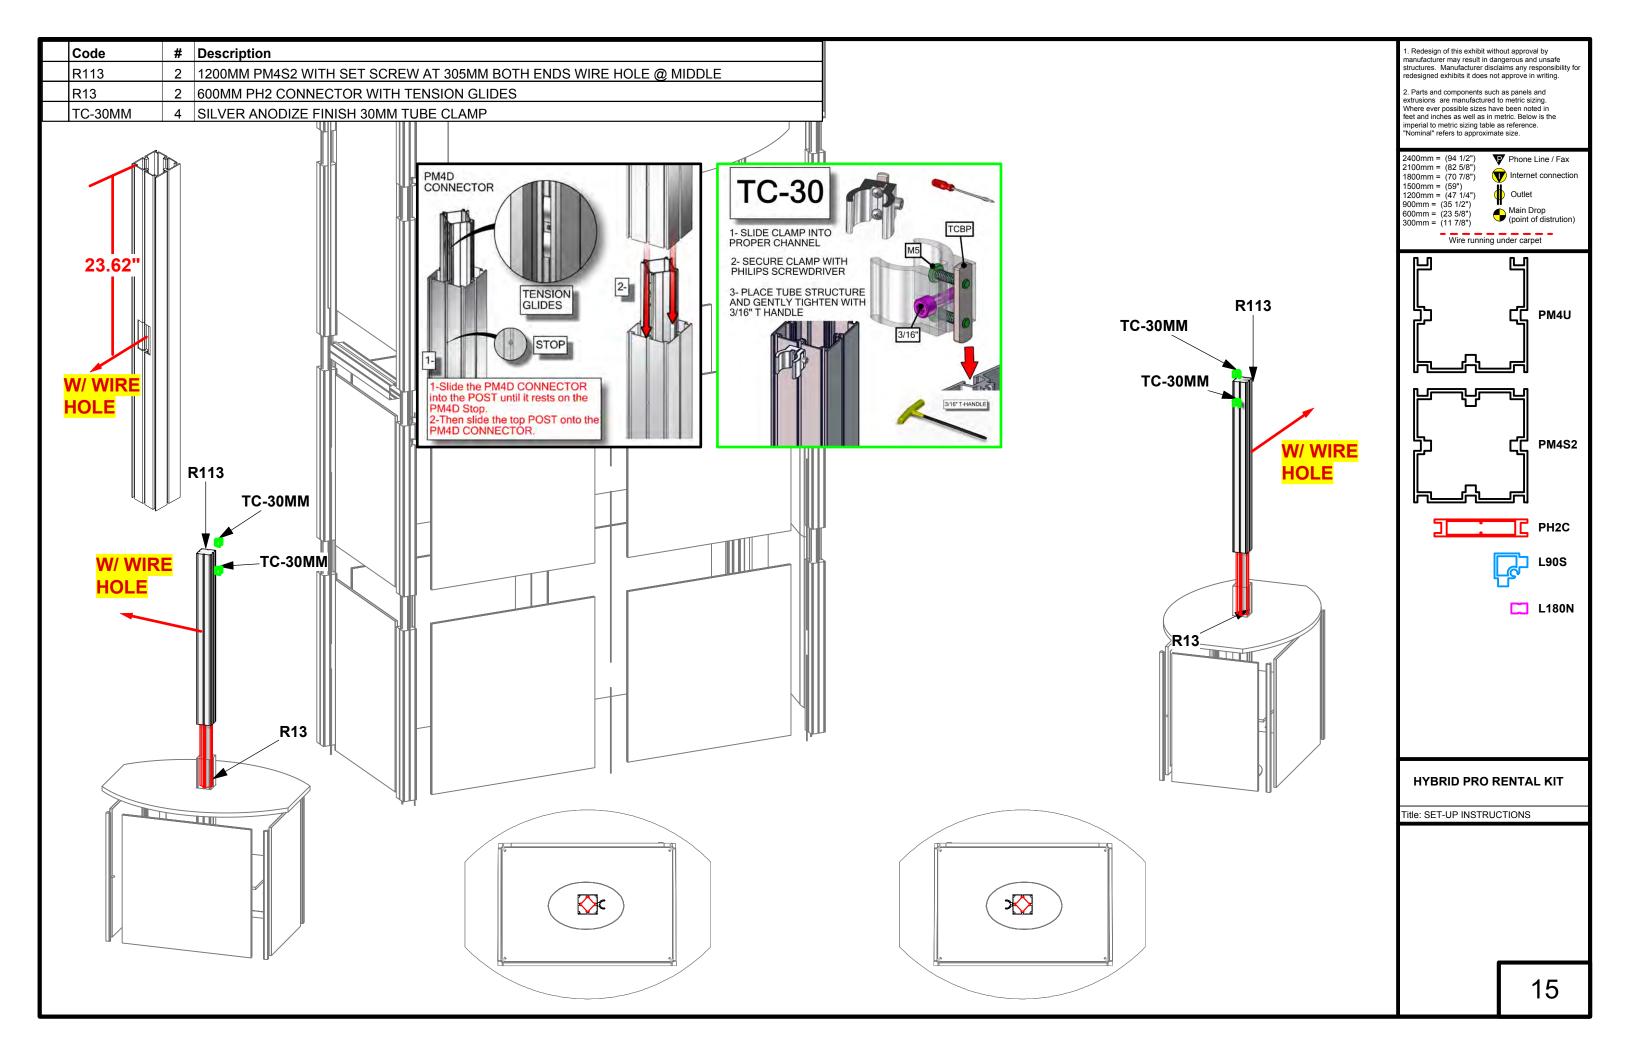


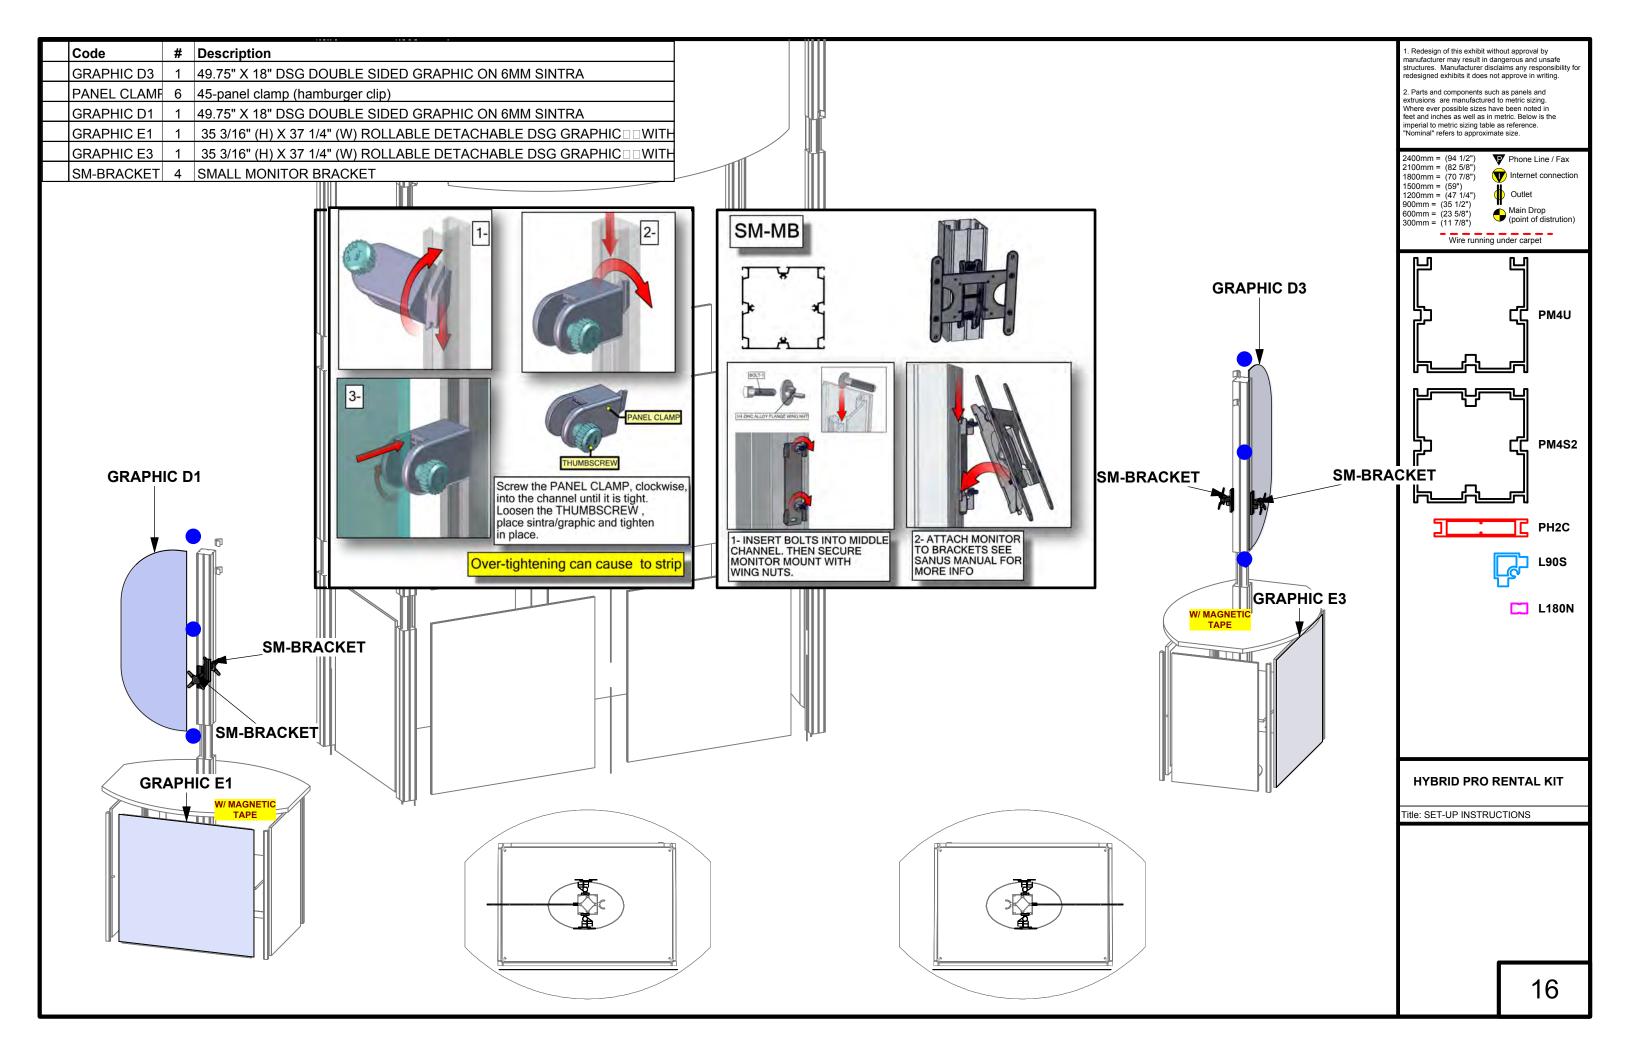


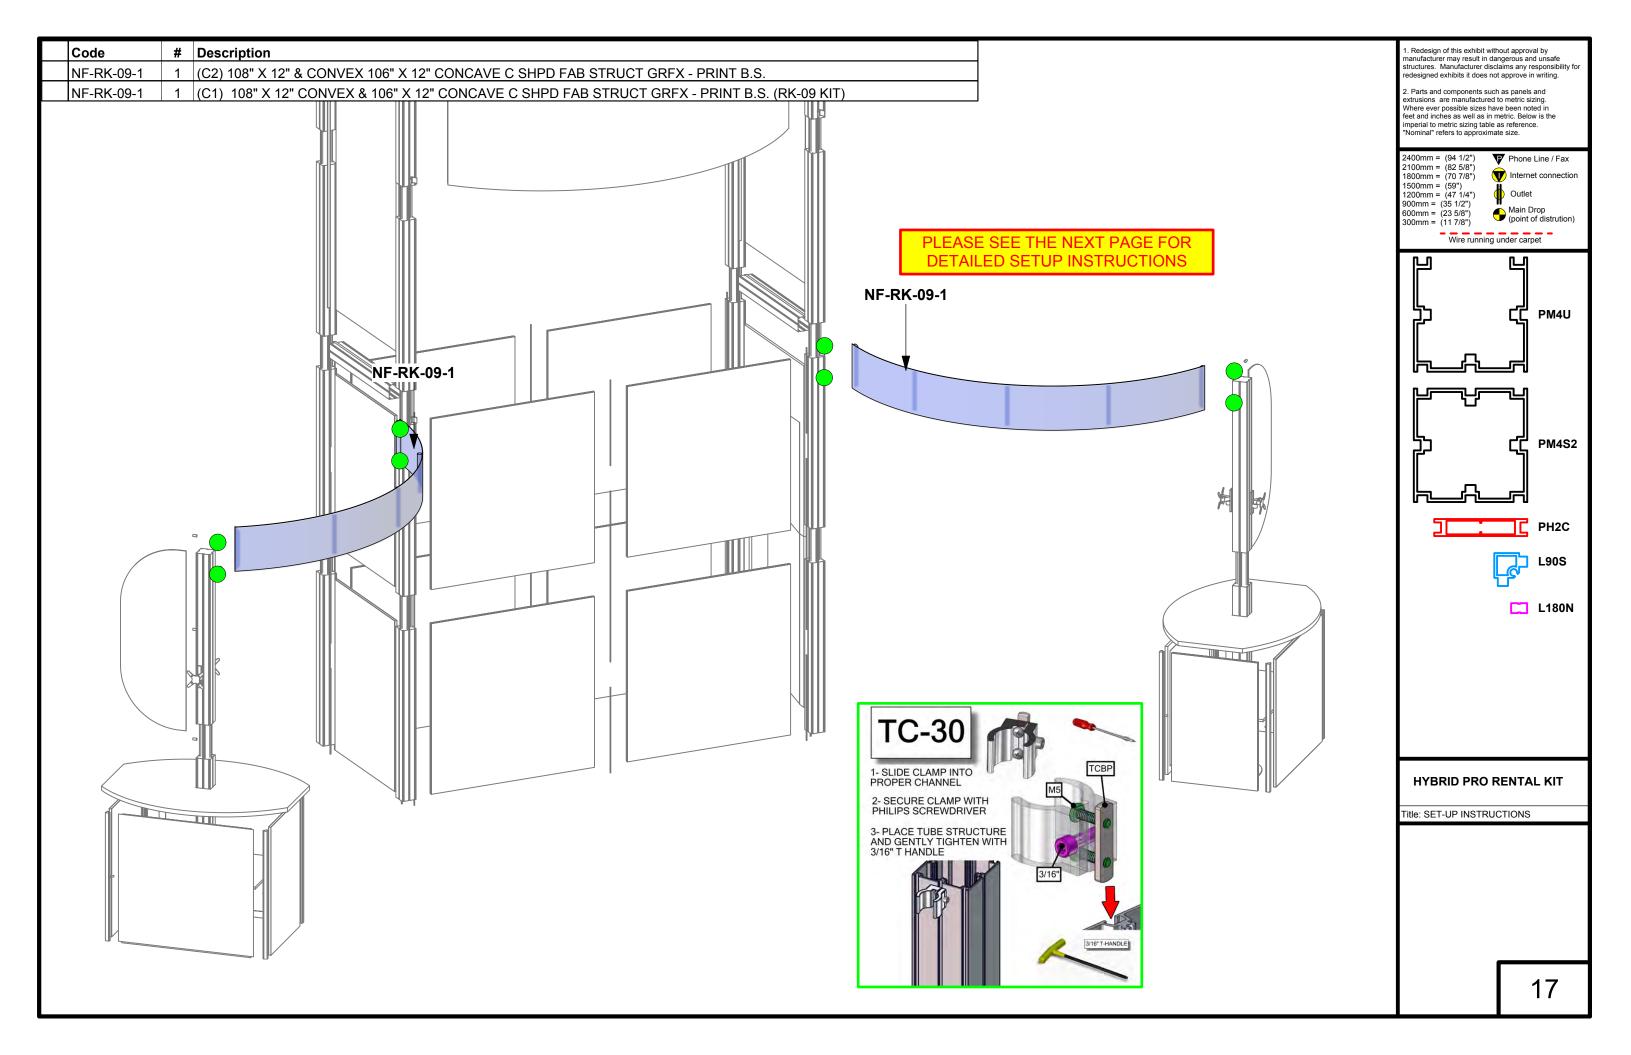

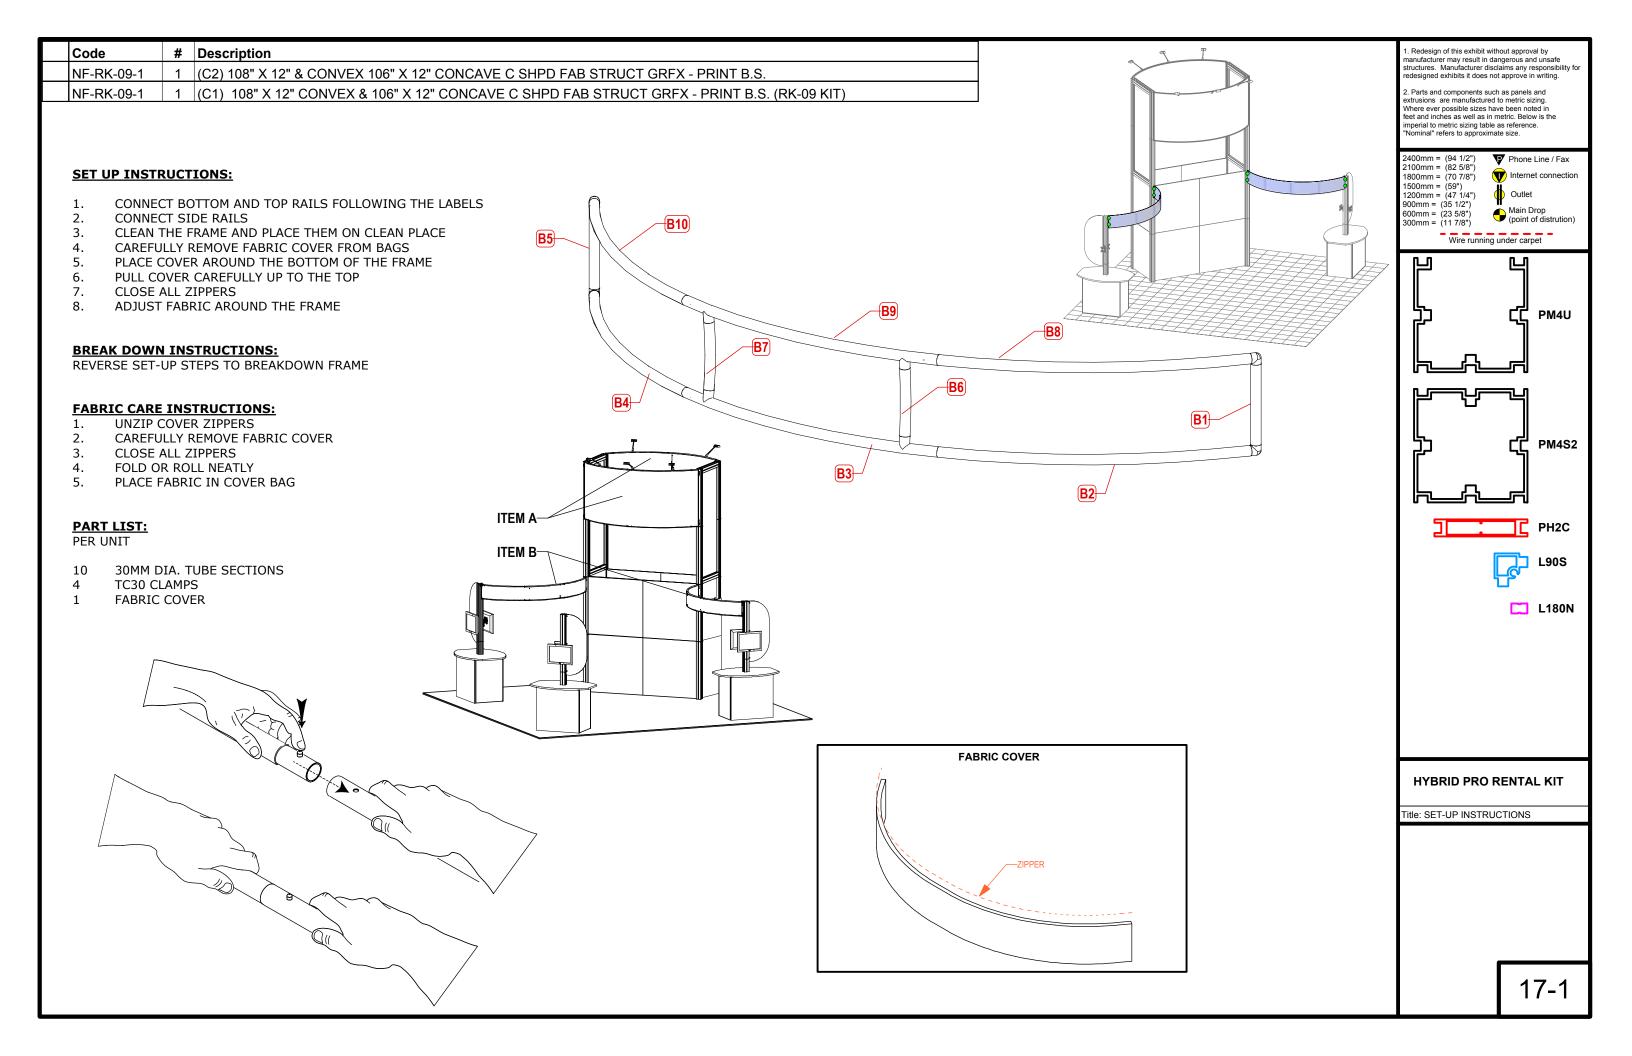


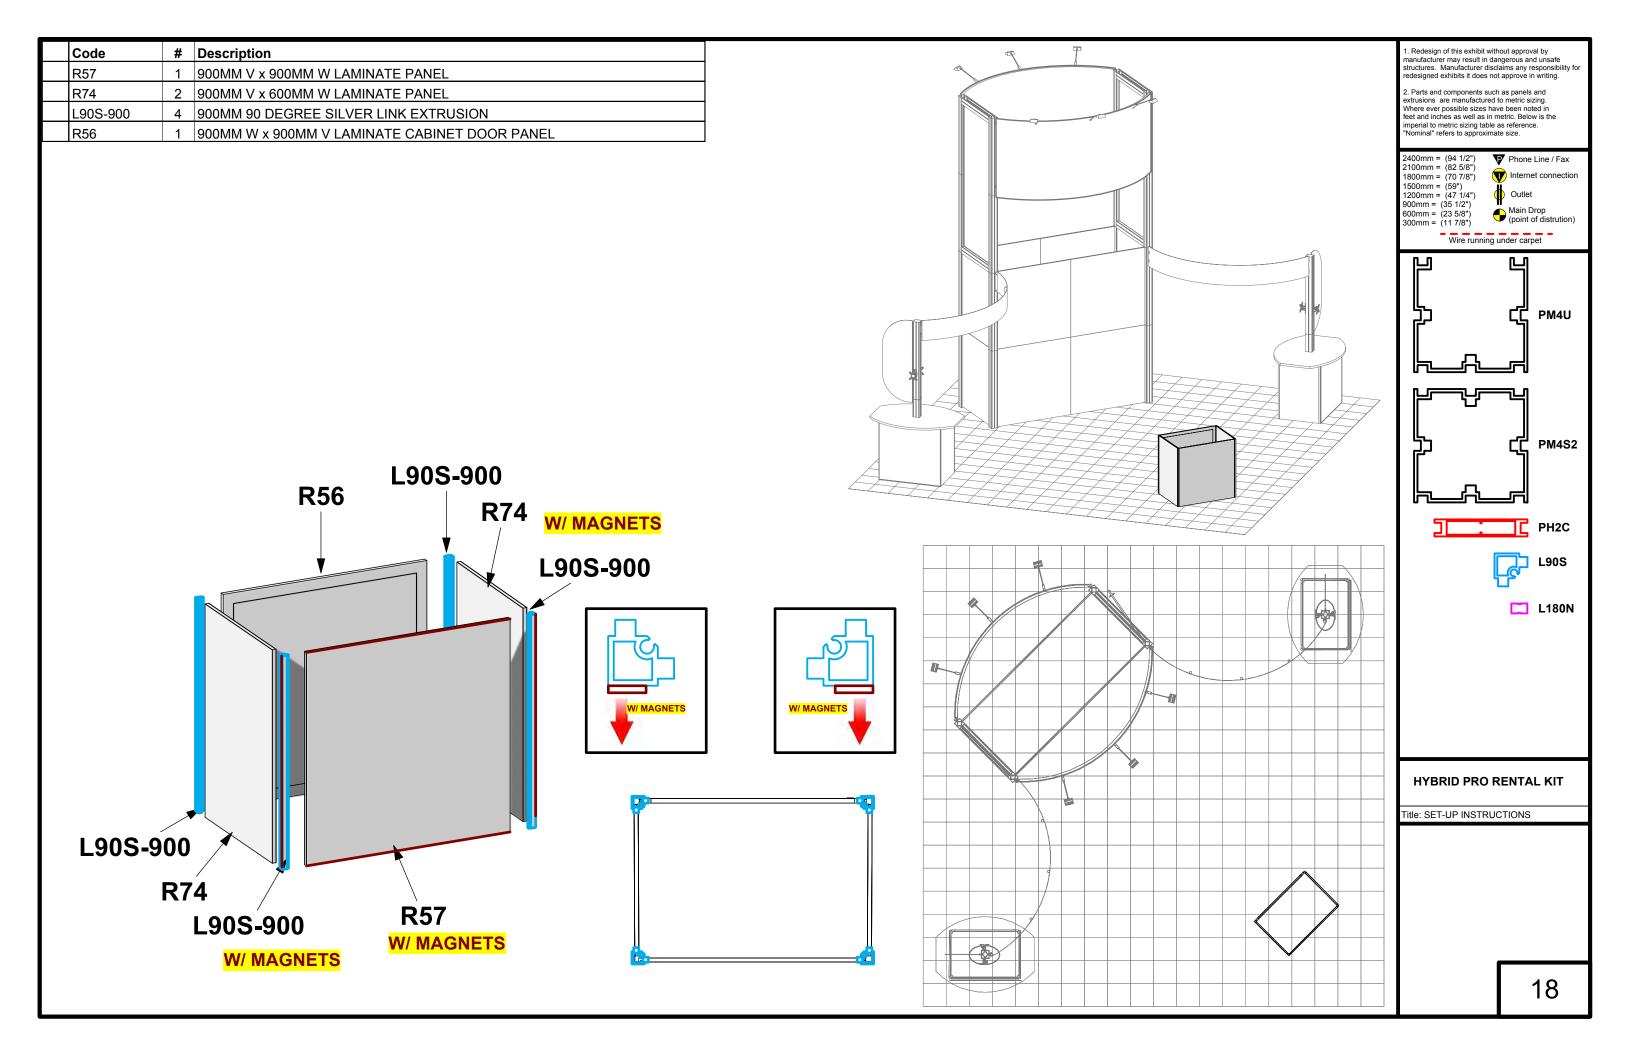


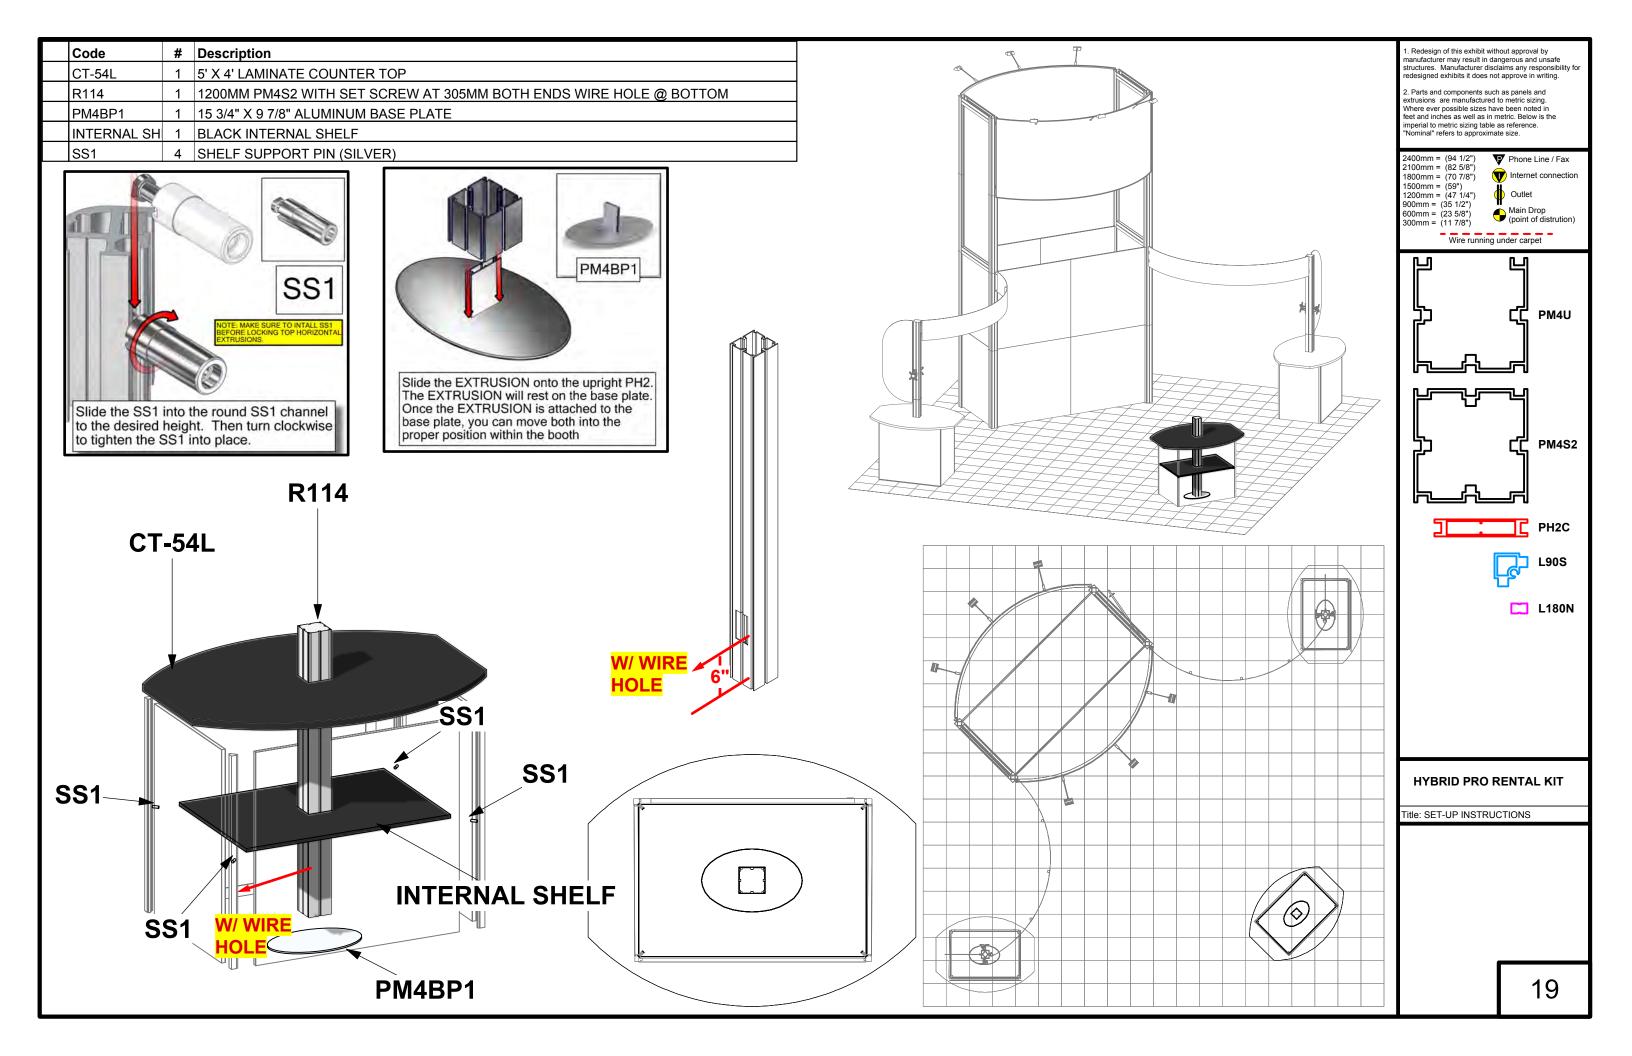


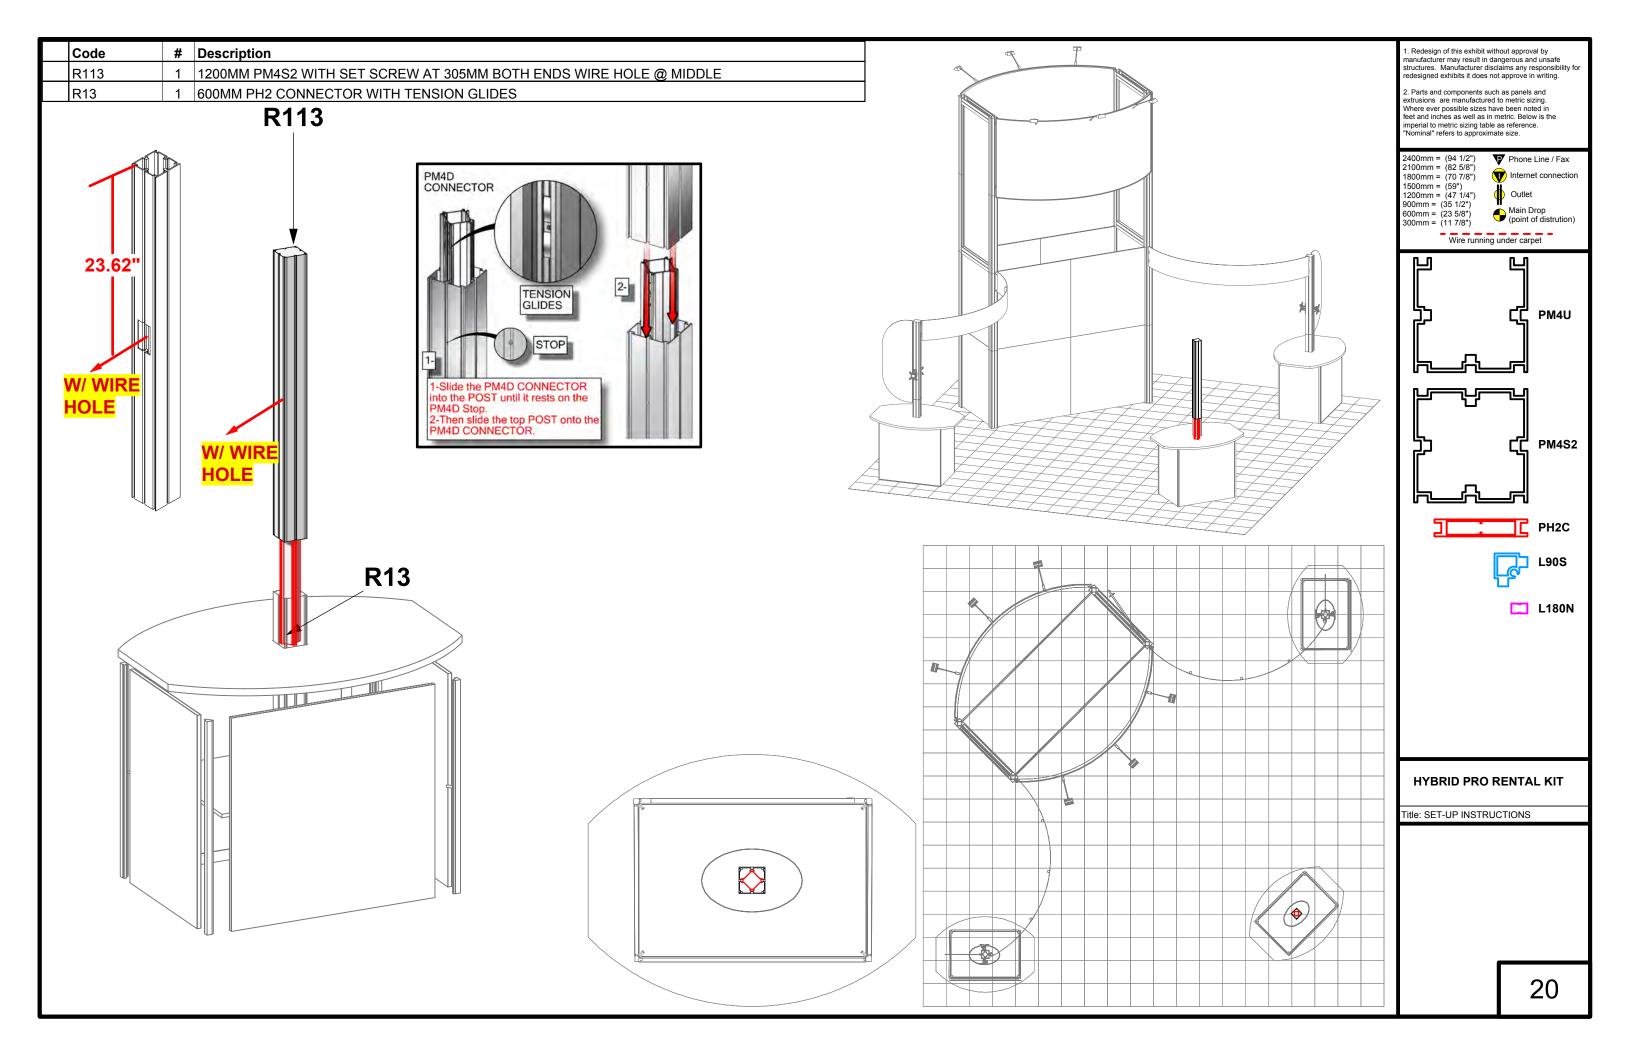


Code	#	Description
GRAPHIC D2	1	49.75" X 18" DSG DOUBLE SIDED GRAPHIC ON 6MM SINTRA
PANEL CLAMP	3	45-panel clamp (hamburger clip)
GRAPHIC E2	1	35 3/16" (H) X 37 1/4" (W) ROLLABLE DETACHABLE DSG GRAPHIC□□WITH
SM-BRACKET	2	SMALL MONITOR BRACKET

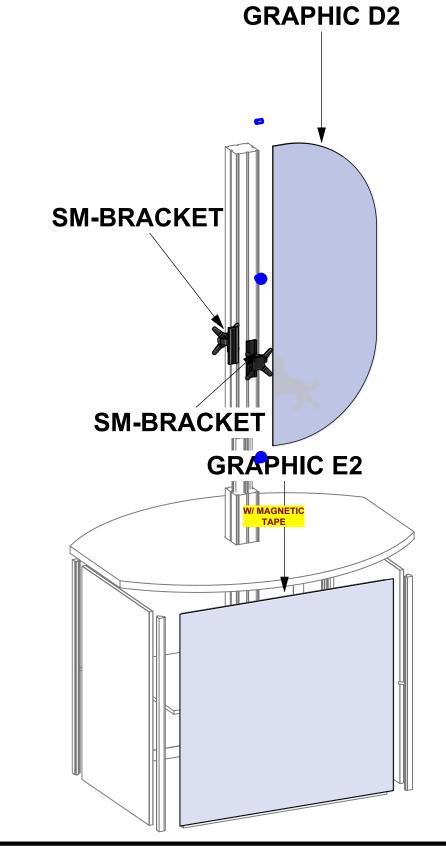





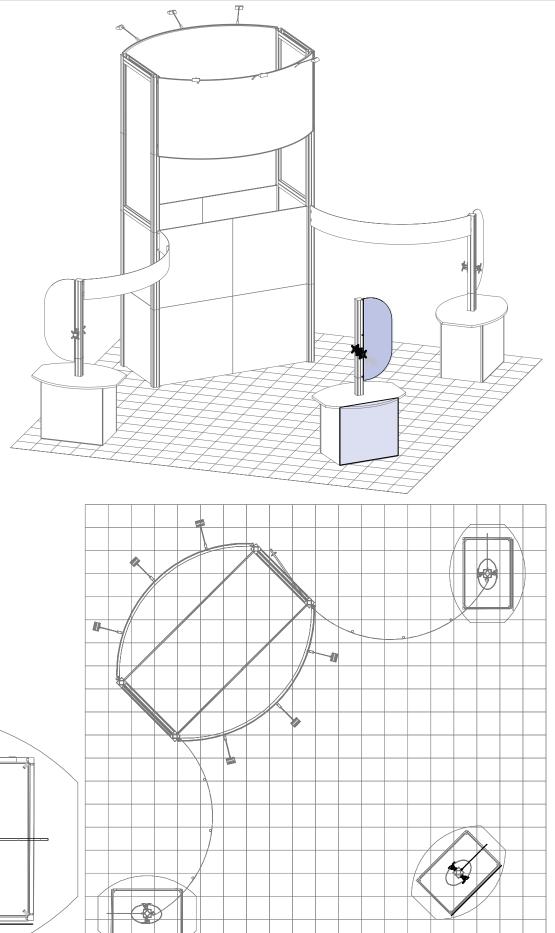

 Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference.

"Nominal" refers to approximate size.


2400mm = (94 1/2") 2100mm = (82 5/8") 1800mm = (70 7/8") 1500mm = (59") 1200mm = (47 1/4")

Phone Line / Fax

Internet connection

900mm = (35 1/2") 600mm = (23 5/8") 300mm = (11 7/8") Main Drop (point of distrution)

Wire running under carpet

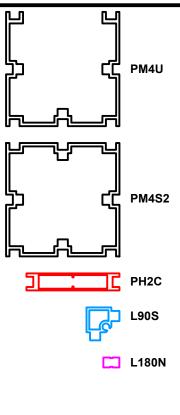

HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS

21

# PACKING INSTRUCTIONS


































- (6) SM-MB, (3) PM4BP1, (6) LEDL 10S LIGHTS, (1) STEAME HARDWARE BOX
- 14 (1) R69
- 13 (1) CT-54L
- 12 (2) CT-54L
- 11 (3) INTERNAL SHELVES
- 10 (2) R56
- 9 (1) R57, (1) R56
- 8 (5) R74
- **7** (2) R57, (1) R74
- 6 (2) R70
- **5** (2) R70
- 4 (2) R70
- 3 (2) R70, (4) R67, (4) R68, (6) R74
- (2) R35, (2) R66, (15) R13, (20) L180-600, (10) L180N-1200, (12) L90S-900
- 1 (16) R15, (3) R114, (3) R113





