
Hercules 15

OR-K-HC15

The Hercules line of Orbital Express Truss[™] features basic backwalls and kits in a variety of sizes to suit a range of space needs. A benefit to this versatile system is that it enables you to reconfigure kits in multiple ways and combinations using the same parts. Simply add or detract from any Hercules kit to create a new appearance for every event or tradeshow!



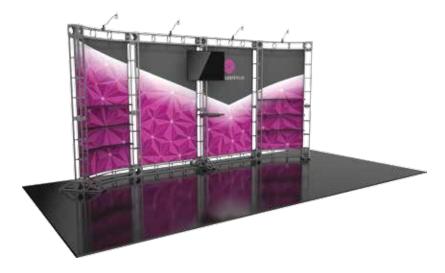

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

features and benefits:

- Kit includes:

- 7 x 6-way junction boxes
- 5 x 36" straight truss lengths
- 9 x 46" straight truss lengths
- 4 x 45° curved truss lengths
- 3 x junction base A
- 1 x full set of quicklock connectors
- 6 x 45° internal shelves
- 1 x adjustable tabletop
- 4 x 50 watt spotlights
- 1 x OCF molded case
- 2 x OCH2 molded cases

dimensions: Hardware: Graphics: Fits in a 10' x 20' space Refer to related graphic template for specific information on sizes and bleeds. Dye-sublimated graphic require different bleed than UV. Visit: www.exhibitors-handbook.com/ graphic-templates Shipping: 4 OCH2 cases (each): 52"l x 29"w x 15"h 1321mm(l) x 737mm(w) x 381mm(h) Approximate weight: 414.75 lbs / 188 kgs additional information: - Graphic materials: *Monitor mount and monitor not included Dye sublimated or UV panels - Tabletop color options: - Lumina 1, 50 watt spotlight - Tabletop: max weight = 25 lbs / 11.34 kgs silver black mahogany natural

- 10' x 20' kit size

- Tooless assembly

- Custom appearance

- Simple twist and lock design


- 5 year warranty against

manufacturer defects


- Shelves (each): max weight = 25 lbs / 11.34 kgs

05/06/16

HERCULES 15 PIECE COUNT:

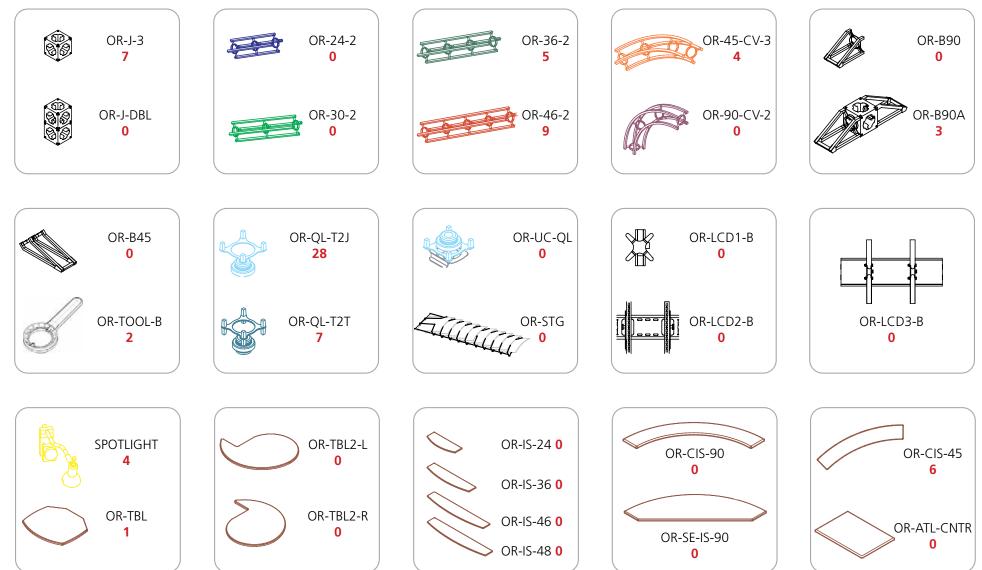



HERCULES 15 TABLETOP ACCESSORY PIECE COUNT:

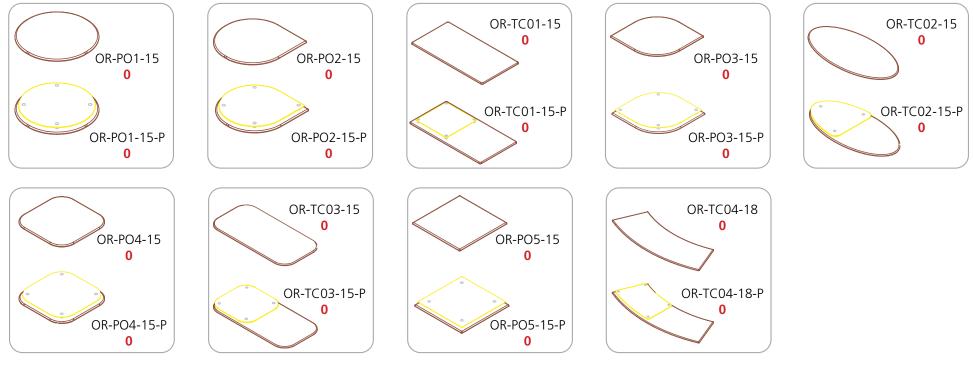

HERCULES 15 CASE COUNT:
















HERCULES 15 GRAPHIC SPECS: AVAILABLE GRAPHICS – UV & DYE SUBLIMATION


BS OR-G-HC15-1	BS OR-G-HC15-2	BS OR-G-HC15-3	BS OR-G-HC15-4
OR-G-HC15-1	OR-G-HC15-2	OR-G-HC15-3	OR-G-HC15-4
Notched 7/8" @ bottom left corner.	Notched 7/8" @ bottom right corner.	Notched 7/8" @ bottom left corner.	Notched 7/8" @ bottom right corner.

Acceptable File formats:	Bleeds:	Color:	Finishing Details:
Illustrator CS6 or below	All orbital truss graphics require specifics bleeds.	All files are printed as CMYK format. All critical	When graphics are notched, a 7/8" square is cut in
Photoshop CS6 or below	The sizes listed above represent the finished	Pantone colors need to be called out in the file	the appropriate location.
Art time will be charged if files need to be fixed	graphic size. Please keep all logos, type and	or specified on the order as Coated or Uncoated	
or altered to meet guildlines. When sending files	critical information at least 1 " in from each edge	swatches.	FS: Graphics mounted to front of truss system
please be sure to include all support art (fonts,	of the finished graphic.		BS: Graphics mounted to back of truss system
linked images, etc.)		Resolution:	
	Dye Sublimation: 2" bleed around the	All raster files (either print files or linked files)	Dye Sublimation graphics are attached to truss
Font Specifications:	perimeter.	must be at 100-120 pixels per inch at 100%	with velcro. UV panels are attached to truss with
Fonts must be converted to outlines.	UV: 1/2 " bleed around the perimeter.		magnet.
To ensure quality, please note:			

Each graphic has a specific code or number located on the graphic. The electronic print files provided must be named accordingly. Using this coding system will allow us to preflight and prepare your files for print more efficiently. If you fail to provide your graphic files in this format, additional charges may be necessary to complete your printed materials.

HERCULES 15 FLOOR PLAN:

SCALE REF = 5ft

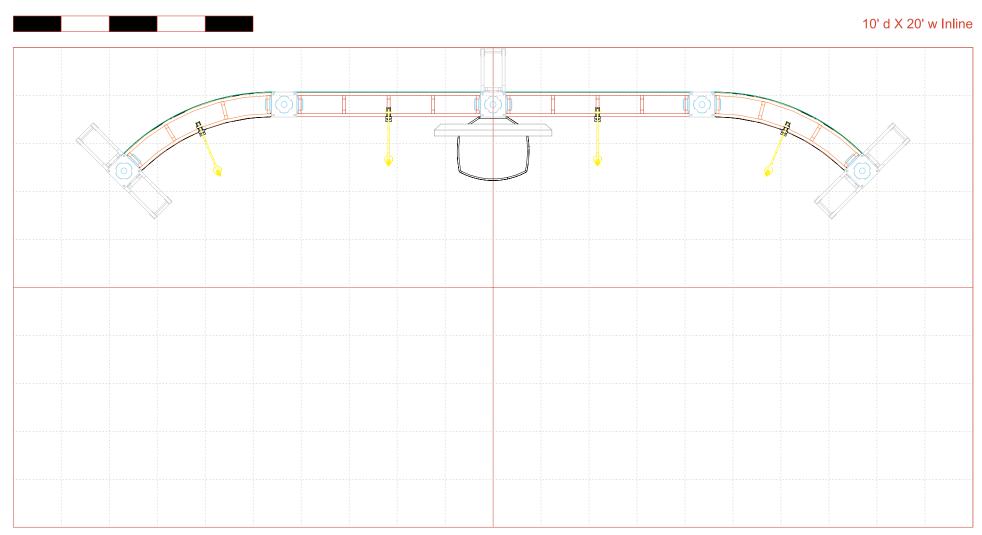

Parts exploded